



**HAL**  
open science

## Thermal-Plume fibre Optic Tracking (T-POT) test for flow velocity measurement in groundwater boreholes

T. Read, Victor F. Bense, Olivier Bour, Tanguy Le Borgne, Nicolas Lavenant, Rébecca Hochreutener, J. S. Selker

### ► To cite this version:

T. Read, Victor F. Bense, Olivier Bour, Tanguy Le Borgne, Nicolas Lavenant, et al.. Thermal-Plume fibre Optic Tracking (T-POT) test for flow velocity measurement in groundwater boreholes. *Geoscientific Instrumentation, Methods and Data Systems*, 2015, 5 (5), pp.161-175. 10.5194/gid-5-161-2015 . insu-01164709

**HAL Id: insu-01164709**

**<https://insu.hal.science/insu-01164709v1>**

Submitted on 17 Jun 2015

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



**Thermal-Plume fibre  
Optic Tracking  
(T-POT) test for flow  
velocity  
measurement**

T. Read et al.

# Thermal-Plume fibre Optic Tracking (T-POT) test for flow velocity measurement in groundwater boreholes

T. Read<sup>1</sup>, V. F. Bense<sup>1</sup>, O. Bour<sup>2</sup>, T. Le Borgne<sup>2</sup>, N. Lavenant<sup>2</sup>, R. Hochreutener<sup>3</sup>,  
and J. S. Selker<sup>3</sup>

<sup>1</sup>School of Environmental Sciences, University of East Anglia, Norwich Research Park,  
Norwich, NR4 7TJ, UK

<sup>2</sup>Géosciences Rennes, UMR 6118, CNRS, University of Rennes 1, Rennes, France

<sup>3</sup>Biological and Ecological Engineering, Oregon State University, Corvallis, OR 97331, USA

Received: 23 April 2015 – Accepted: 18 May 2015 – Published: 11 June 2015

Correspondence to: T. Read (tom.read@uea.ac.uk)

Published by Copernicus Publications on behalf of the European Geosciences Union.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



## Abstract

We develop an approach for measuring in-well fluid velocities using point electrical heating combined with spatially and temporally continuous temperature monitoring using Distributed Temperature Sensing (DTS). The method uses a point heater to warm a discrete volume of water. The rate of advection of this plume, once the heating is stopped, equates to the average flow velocity in the well. We conducted Thermal-Plume fibre Optic Tracking (T-POT) tests in a borehole in a fractured rock aquifer with the heater at the same depth and multiple pumping rates. Tracking of the thermal plume peak allowed the spatially varying velocity to be estimated up to 50 m downstream from the heating point, depending on the pumping rate. The T-POT technique can be used to estimate the velocity throughout long intervals provided that thermal dilution due to inflows, dispersion, or cooling by conduction do not render the thermal pulse unresolvable with DTS. A complete flow log may be obtained by deploying the heater at multiple depths, or with multiple point heaters.

## 1 Introduction

The measurement of the vertical flow in wells can improve our conceptual understanding of subsurface fluid movement, which can aid in, for example, groundwater resources management or geothermal resource assessments. In open or long-screened wells penetrating multiple permeable units or fractures, vertical flow typically occurs in hydraulically unstressed conditions due to the natural occurrence of a vertical head gradient. Flow logs obtained in unstressed conditions gives a qualitative guide to fracture inflow and outflow zones (Hess, 1986). Alternatively, flow logs obtained in a pumping well at multiple different pumping rates allow the depth variability of transmissivity to be estimated (Paillet et al., 1987). Flow logs in observation wells affected by nearby pumping enables the connectivity of fractures to be determined (Paillet, 1998; Klepikova et al., 2013). In all cases, the in-well flow is not directly indicative of flow in the formation itself

## Thermal-Plume fibre Optic Tracking (T-POT) test for flow velocity measurement

T. Read et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[▶⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



## Thermal-Plume fibre Optic Tracking (T-POT) test for flow velocity measurement

T. Read et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



since the presence of the well as a high permeability vertical conduit allows the short circuiting of flow. In addition, flow logs have inherent value for geochemical sampling campaigns. Ambient vertical flow through the well may redistribute contaminants and mean that passive sampling approaches do not reproduce the same depth variability as present in the aquifer itself (Elci et al., 2003). Typical flow logging techniques involve lowering an impeller or electromagnetic flowmeter down a well and either measuring continuously (trolling) or at multiple points with the probe held stationary. At low flows a heat pulse flowmeter may be used at fixed depths (Paillet, 1998).

Alternatively, tracer based approaches may be used. Most commonly, a tracer is placed over the entire length of the borehole and the change in concentration monitored over time. Typically, slightly saline (Maurice et al., 2011), or distilled water (Doughty et al., 2005) is added since fluid electrical conductivity (EC) can be easily logged with an EC meter. The EC is then monitored over depth and time by making repeated logs. The dilution of the saline profile at inflow locations or increase in EC if using distilled water can be used to estimate horizontal flow through the aquifer using simple analytical solutions (Pitrak et al., 2007). If there is vertical flow in the well, a salinity front then migrates up or down the well. In the case of multiple inflows with multiple salinity fronts, the response over depth and time may become complex and require numerical modelling (Maurice et al., 2011), or inversion methods to extract the vertical flow profile (Moir et al., 2014). A limitation of this method is that when the vertical velocity or losses from the borehole to the aquifer are high, the EC signal rapidly dissipates and monitoring this process over a large depth interval with a single EC logger yields an incomplete dataset. Additionally, density induced flow effects in well bores are significant even for small gradients of fluid density (Berthold, 2010).

Instead of a hydrochemical signal that can be difficult to monitor over space and time, Leaf et al. (2012) introduced a slug of warm water to a target depth. By using temperature as the tracer, it is possible to monitor the response continuously over depth and time along a fibre optic cable installed in the well with the Distributed Temperature Sensing (DTS) technique (see Selker et al. (2006), for a description of the

## Thermal-Plume fibre Optic Tracking (T-POT) test for flow velocity measurement

T. Read et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



DTS method). Leaf et al. (2012) heated water at the surface and injected it at multiple depths to identify the flow direction and velocity. However, the process of heating water is cumbersome and, its injection is likely to result in head changes in the well resulting in an altered flow regime particularly if ambient or low pumping rate conditions are of interest. Sellwood (2012) adapted this method by using an electrical heater to generate the thermal disturbance and carried out tests under non-hydraulically stressed conditions in a dual permeability sandstone aquifer. In this study we deploy a single electrical heater to warm a discrete interval of water at depth in a pumping well in a fractured rock aquifer, monitored with DTS. We apply post-collection averaging to the DTS temperature data and track the peak of the plume over time to estimate the mean vertical velocity. We call this method Thermal-Plume fibre Optic Tracking (T-POT).

## 2 T-POT field application

We deployed T-POT at the H+ network research site ([hplus.ore.fr/en](http://hplus.ore.fr/en)), Ploemeur France (Fig. 1a). The site has multiple boreholes up to 100 m deep, penetrating micaschist and granitic rock. Open fractures, although sparse (< 5 hydrogeologically significant fractures per borehole), are reasonably transmissive (up to  $4 \times 10^{-3} \text{ m}^{-2} \text{ d}^{-1}$ ). We show T-POT results from borehole B3 (11.8 cm diameter), which is intersected by three previously identified transmissive fractures (Fig. 1b). Fractures B3-2 and B3-3 have similar transmissivities ( $\sim 2 \times 10^{-3} \text{ m}^{-2} \text{ d}^{-1}$ ), while B3-1 is approximately an order of magnitude less transmissive Klepikova (2013).

We used a 2 kW rated heating element as the heat source (Fig. 1c), lowered down to 68 m depth for the duration of the experiment. Additionally, an armoured fibre optic cable was installed in the well down to a depth of approximately 80 m. This allowed temperature measurements to be made over a time average of 5 s and sampling interval of 0.12 m with DTS by connecting it to a Silixa Ultima base unit. The cable was configured for a duplexed single ended measurement. The DTS data were calibrated using 3 reference sections from a cold and ambient bath, according to the method de-

scribed by Hausner et al. (2011). The standard deviation of temperature in the cold and ambient baths for the 5 s integration time averaged 0.38 and 0.33 °C respectively over the duration of the T-POT tests.

We ran a series of tests at different pumping rates to determine the fracture inflow for each pumping rate, in order to evaluate the T-POT method. For each pumping rate, a similar procedure was followed: heat for ~ 10 min, then switch off the heating and simultaneously turn on the pump at the selected rate. We repeated this procedure for pumping rates of 7.3, 40.0, 86.6, 104.0, 136.2 Lmin<sup>-1</sup>. During each experiment we measured the pumping rate manually and with an in-line flowmeter, drawdown, electrical power supplied to the heating element, and temperature along the length of the borehole with DTS.

### 3 T-POT results and interpretation

Figure 2 shows successive DTS temperature depth profiles from the 5 T-POT experiments. A background temperature depth profile, defined by a 1 min time average immediately prior to the start of heating, was subtracted from each dataset. During the heating phase ( $t < 0$  min), it appears that the plume develops asymmetrically, with the base of the plume at 68 m at the approximate depth of the heater. The heater is switched off at  $t = 0$  and at this moment pumping is initiated. The plume is then advected upwards at higher velocity. In all cases, the linear path of the plume in the temperature-depth-time plot suggests a uniform velocity from 68 m to around 45 m, as would be expected given the lack of transmissive fractures and uniform borehole diameter in this interval. At 45 m, the temperature signal is significantly reduced and the plume then continues to move upwards at higher velocity (steeper gradient in Fig. 2c–e). This coincides with a transmissive fracture identifiable in previous flowmeter tests and optical borehole logs (Le Borgne et al., 2007).

To aid the identification of the plume peak, the 5 s time averaged and 0.12 m spatially sampled DTS temperature data were then subsequently further averaged to give the

## Thermal-Plume fibre Optic Tracking (T-POT) test for flow velocity measurement

T. Read et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



equivalent of 15 s time averaged DTS temperature data. Each point was then spatially smoothed with a 9 point moving average window. These are plotted as temperature-depth profiles in Fig. 3. Below 45 m, the plume is clearly defined. Above the inflow from B3-2 at 45 m, the plume becomes much less discernible (Fig. 3c–e).

The depth location of the maximum temperature was then extracted and plotted over time (Fig. 4). While the peak of the plume remains below fracture B3-2, the plume is readily resolvable in the temperature data. Linear least-squares regression yields an  $r^2 \geq 0.98$  for all of the pumping rates. The average flow velocities  $v_1$  and  $v_2$  were calculated from the gradient of the best fit line through plume peak location data. The corresponding volumetric flow rates  $Q_{B3-3}$  and  $Q_{B3-1,2,3}$  were calculated from  $v_1$  and  $v_2$  respectively using the known borehole diameter over this interval.

Above 45 m, the peak of the plume was not detected for 1–2 min after the arrival of the plume peak at B3-2. This is because in this situation, the inflow from B3-2 greatly dilutes the thermal signal, such that until most of the plume has moved above the fracture, the highest temperature (and plume peak, as identified with this method), remains at the depth of the fracture. Once identified again, now at approximately the depth of B3-1, the peak location data show that the plume is now travelling at higher velocity. Here it is much less detectable, with an  $r^2$  for the three cases where the plume passes this point of 0.76, 0.65, and 0.91. However, it is not possible to separately assess the flow contributions of B3-2 and B3-1, since two separate contributions are not apparent in Figs. 2–4. Therefore we are only able to estimate  $Q_{B3-3}$  (the flow below 45 m) and  $Q_{B3-1,2,3}$  representing the cumulative flow contribution from all transmissive fractures intersecting the well.

## 4 Discussion

The upwards expansion of the plume during the heating phase is driven by upward ambient fluid flow in the borehole. The rate of the ambient flow component between B3-3 and B3-2 has been measured at approximately  $5 \text{ L min}^{-1}$  in previous studies

GID

5, 161–175, 2015

### Thermal-Plume fibre Optic Tracking (T-POT) test for flow velocity measurement

T. Read et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)









## 5 Conclusions

We deployed the T-POT method in a groundwater well in fractured rock. By heating a discrete volume of the resident water in the borehole, estimates of vertical in-well velocity were obtained by tracking its subsequent migration with DTS. The plume was significantly reduced beyond a major inflowing fracture but was still detectable, albeit with much increased uncertainty. The advantage of this method is that it is quick and simple, especially if the well is already instrumented for fibre optic temperature monitoring.

*Acknowledgements.* Funding for this work was provided by the INTERREG IV project CLIMAWAT, the national network of hydrogeological sites H+, the ANR project CRITEX ANR-11-EQPX-0011, and a Natural Environment Research Council (NERC) studentship (NE/J500069/1) to Tom Read. Part of the support for the participation of John Selker and provision of some of the fibre optic cables were provided by the Center for Transformative Environmental Monitoring Programs (CTEMPs) funded by the National Science Foundation. The data collected for this study will be available from the national network of hydrogeological sites H+, at <http://hplus.ore.fr/en/>.

## References

- Berthold, S.: Synthetic convection log – characterization of vertical transport processes in fluid-filled boreholes, *J. Appl. Geophys.*, 72, 20–27, doi:10.1016/j.jappgeo.2010.06.007, 2010. 163
- Berthold, S. and Resagk, C.: Investigation of thermal convection in water columns using particle image velocimetry, *Exp. Fluids*, 52, 1465–1474, doi:10.1007/s00348-012-1267-7, 2012. 168
- Doughty, C., Takeuchi, S., Amano, K., Shimo, M., and Tsang, C.-F.: Application of multirate flowing fluid electric conductivity logging method to well DH-2, Tono Site, Japan, *Water Resour. Res.*, 41, W10401, doi:10.1029/2004WR003708, 2005. 163
- Elci, A., Flach, G. P., and Molz, F. J.: Detrimental effects of natural vertical head gradients on chemical and water level measurements in observation wells: identification and control, *J. Hydrol.*, 281, 70–81, doi:10.1016/S0022-1694(03)00201-4, 2003. 163

GID

5, 161–175, 2015

### Thermal-Plume fibre Optic Tracking (T-POT) test for flow velocity measurement

T. Read et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## Thermal-Plume fibre Optic Tracking (T-POT) test for flow velocity measurement

T. Read et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

- Hausner, M. B., Suárez, F., Glander, K. E., Giesen, N. V. D., Selker, J. S., and Tyler, S. W.: Calibrating single-ended fiber-optic Raman spectra distributed temperature sensing data, *Sensors*, 11, 10859–10879, doi:10.3390/s111110859, 2011. 165
- Hess, A. E.: Identifying hydraulically conductive fractures with a slow-velocity borehole flowmeter, *Can. Geotech. J.*, 23, 69–78, 1986. 162
- Klepikova, M. V.: Imaging of fractured rock properties from flow and heat transport: field experiments and inverse modelling, PhD thesis, Geosciences Rennes, Rennes, 2013. 164, 167
- Klepikova, M. V., Le Borgne, T., Bour, O., and de Dreuzy, J.-R.: Inverse modeling of flow tomography experiments in fractured media, *Water Resour. Res.*, 49, 7255–7265, doi:10.1002/2013WR013722, 2013. 162
- Leaf, A. T., Hart, D. J., and Bahr, J. M.: Active thermal tracer tests for improved hydrostratigraphic characterization, *Ground Water*, 50, 726–735, doi:10.1111/j.1745-6584.2012.00913.x, 2012. 163, 164
- Le Borgne, T., Bour, O., Riley, M., Gouze, P., Pezard, P., Belghoul, A., Lods, G., Le Provost, R., Greswell, R., Ellis, P., Isakov, E., and Last, B.: Comparison of alternative methodologies for identifying and characterizing preferential flow paths in heterogeneous aquifers, *J. Hydrol.*, 345, 134–148, doi:10.1016/j.jhydrol.2007.07.007, 2007. 165
- Maurice, L., Barker, J., Atkinson, T., Williams, A., and Smart, P.: A tracer methodology for identifying ambient flows in boreholes, *Ground Water*, 49, 227–238, doi:10.1111/j.1745-6584.2010.00708.x, 2011. 163
- Moir, R. S., Parker, A. H., and Bown, R. T.: A simple inverse method for the interpretation of pumped flowing fluid electrical conductivity logs, *Water Resour. Res.*, 50, 6466–6478, doi:10.1002/2013WR013871, 2014. 163
- Paillet, F. L.: Flow modeling and permeability estimation using borehole flow logs in heterogeneous fractured formations, *Water Resour. Res.*, 34, 997–1010, doi:10.1029/98WR00268, 1998. 162, 163
- Paillet, F. L., Hess, A. E., Cheng, C. H., and Hardin, E.: Characterization of fracture permeability with high-resolution vertical flow measurements during borehole pumping, *Ground Water*, 25, 28–40, doi:10.1111/j.1745-6584.1987.tb02113.x, 1987. 162
- Pittrak, M., Mares, S., and Kobr, M.: A simple borehole dilution technique in measuring horizontal ground water flow, *Ground Water*, 45, 89–92, doi:10.1111/j.1745-6584.2006.00258.x, 2007. 163

# GID

5, 161–175, 2015

## Thermal-Plume fibre Optic Tracking (T-POT) test for flow velocity measurement

T. Read et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)


[Interactive Discussion](#)



- Read, T., Bour, O., Selker, J. S., Bense, V. F., Borgne, T. L., Hochreutener, R., and Lavenant, N.: Active-distributed temperature sensing to continuously quantify vertical flow in boreholes, *Water Resour. Res.*, 50, 3706–3713, doi:10.1002/2014WR015273, 2014. 168
- 5 Sammel, E. A.: Convective flow and its effect on temperature logging in small diameter wells, *Geophysics*, 33, 1004–1012, doi:10.1190/1.1439977, 1968. 167
- Selker, J. S., Thévenaz, L., Huwald, H., Mallet, A., Luxemburg, W., Van De Giesen, N., Stejskal, M., Zeman, J., Westhoff, M., and Parlange, M. B.: Distributed fiber-optic temperature sensing for hydrologic systems, *Water Resour. Res.*, 42, W12202, doi:10.1029/2006WR005326, 2006. 163
- 10 Sellwood, S.: Borehole flow characterization using DTS to monitor in-well heat tracer tests, in: *Abstracts with Programs*, vol. 44, Geological Society of America, Charlotte Convention Center Hall B, p. 82, 2012. 164

## Thermal-Plume fibre Optic Tracking (T-POT) test for flow velocity measurement

T. Read et al.

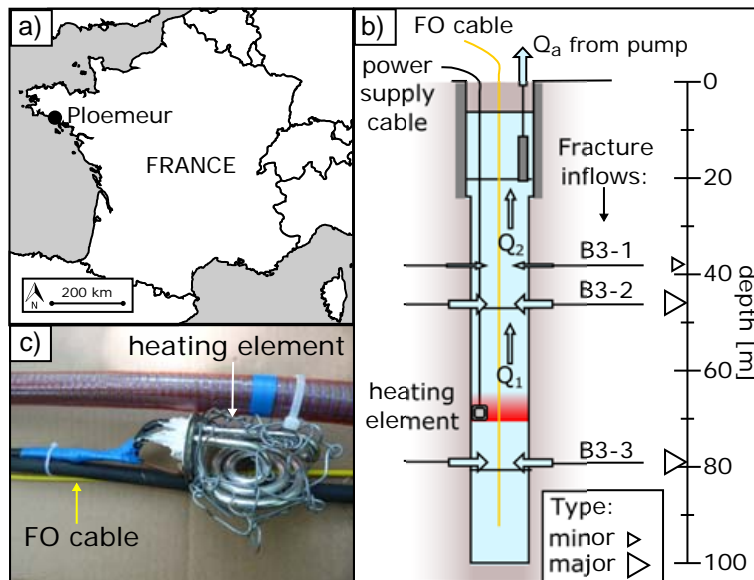

**Figure 1.** (a) Location of the Ploemeur research site, (b) heating element and fibre optic cable along which temperature is measured, (c) schematic of the set-up in borehole B3 at the site.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)


[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

## Thermal-Plume fibre Optic Tracking (T-POT) test for flow velocity measurement

T. Read et al.

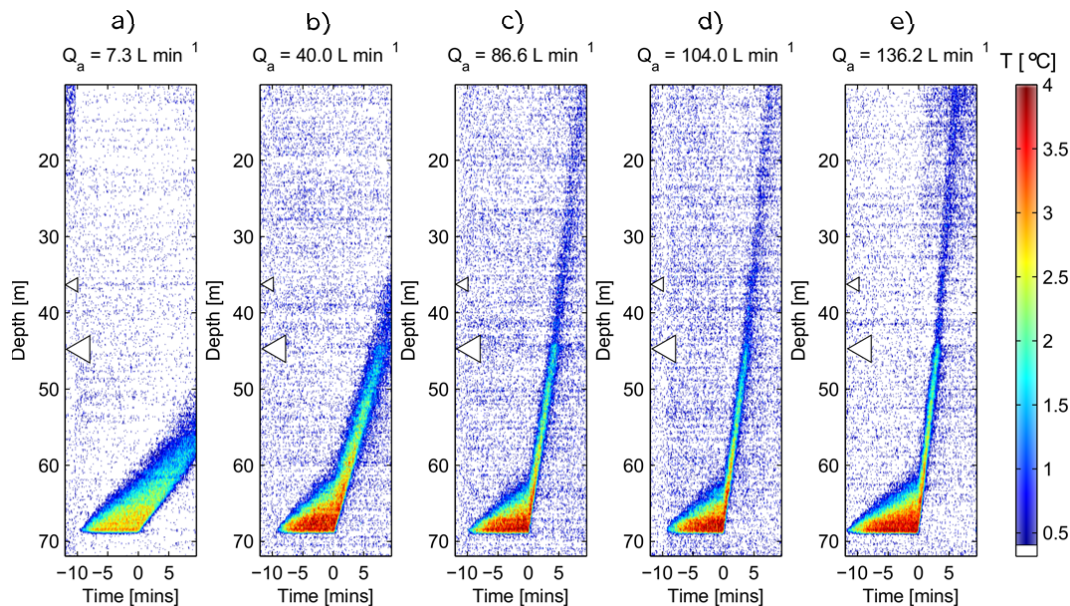

**Figure 2.** Temperature distribution with depth and time for T-POT tests at abstraction rates of (a) 7.3, (b) 40.0, (c) 86.6, (d) 104.0, and (e)  $136.2 \text{ L min}^{-1}$ . The temperature data have a background profile subtracted, with the lower limit to the color scale starting one standard deviation (from reference bath temperature measurements) above  $0^\circ \text{C}$  change.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close


Full Screen / Esc

Printer-friendly Version

Interactive Discussion

## Thermal-Plume fibre Optic Tracking (T-POT) test for flow velocity measurement

T. Read et al.

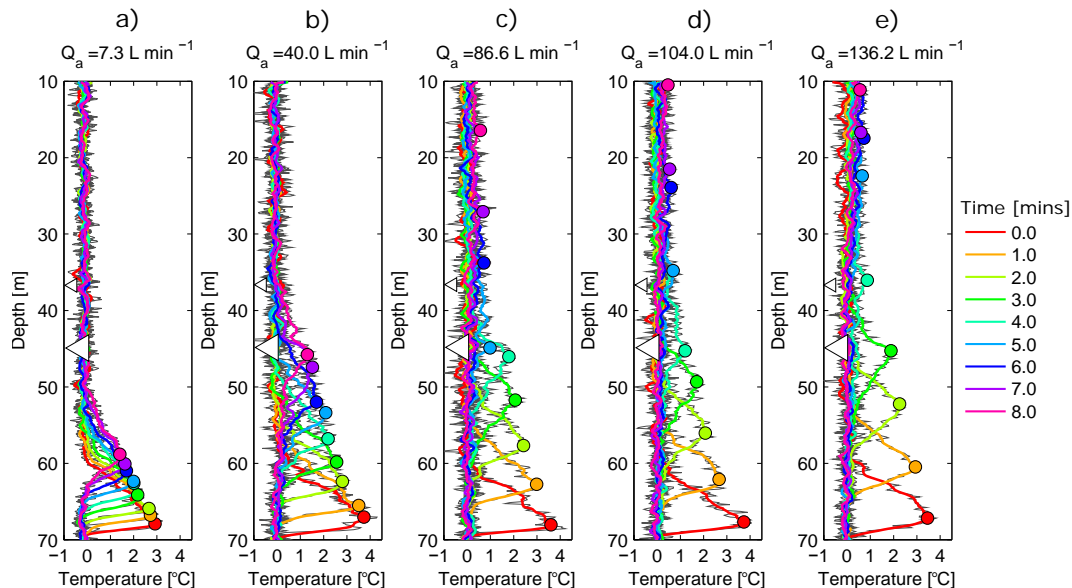

**Figure 3.** Temperature-depth profiles after pumping begins for the T-POT tests at abstraction rates of **(a)** 7.3, **(b)** 40.0, **(c)** 86.6, **(d)** 104.0, and **(e)** 136.2 L min<sup>-1</sup>. The coloured profiles are 15 s time averaged data that has then been spatially smoothed with a 9-point moving window. Filled circles identify the location of the plume peaks.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close


Full Screen / Esc

Printer-friendly Version

Interactive Discussion

## Thermal-Plume fibre Optic Tracking (T-POT) test for flow velocity measurement

T. Read et al.

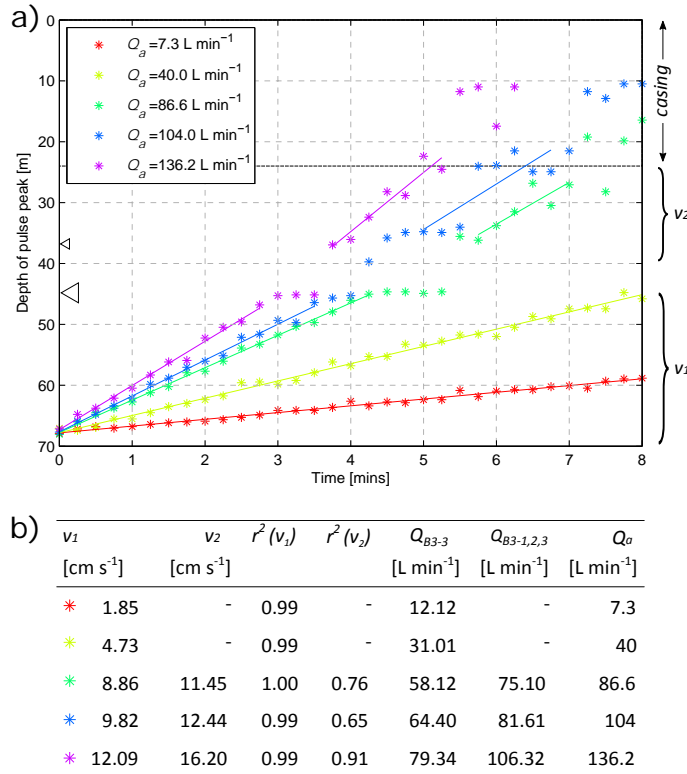

**Figure 4.** Temperature peak depth over time for each of the pumping rates, with linear least-squares regression best fit lines used to estimate the in-well vertical flow velocity.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion