



HAL
open science

Preparing SuperCam for Jezero Crater, Mars: LIBS, Raman, VISIR, Luminescence, Imaging, and Acoustic Analyses

A. M. Ollila, R. C. Wiens, Sylvestre Maurice, Agnès Cousin, Ryan Anderson, Olivier Beyssac, Lydie Bonal, Pierre Beck, S. Clegg, Baptiste Chide, et al.

► To cite this version:

A. M. Ollila, R. C. Wiens, Sylvestre Maurice, Agnès Cousin, Ryan Anderson, et al.. Preparing SuperCam for Jezero Crater, Mars: LIBS, Raman, VISIR, Luminescence, Imaging, and Acoustic Analyses. Ninth International Conference on Mars 2019, Jul 2019, Pasadena, United States. pp.LPI Contribution No. 2089, id.6352. insu-02298514

HAL Id: insu-02298514

<https://insu.hal.science/insu-02298514>

Submitted on 29 Feb 2024

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

PREPARING SUPERCAM FOR JEZERO CRATER, MARS: LIBS, RAMAN, VISIR, LUMINESCENCE, IMAGING, AND ACOUSTIC ANALYSES. A. M. Ollila (amo@lanl.gov)¹, R. C. Wiens¹, S. Maurice², A. Cousin², R. Anderson³, O. Beyssac⁴, L. Bonal⁵, P. Beck⁵, S. Clegg¹, B. Chide², L. DeFlores⁶, G. Dromart⁷, W. Fischer⁸, O. Forni², T. Fouchet⁷, O. Gasnault², J. Grotzinger⁸, J. Johnson⁹, J. Lasue², J. Laserna¹⁰, J. M. Madariaga¹¹, M. Madsen¹², N. Mangold¹³, T. Nelson¹, R. Newell¹, J. Martinez-Frias¹⁴, S. McLennan¹⁵, F. Montmessin¹⁶, S. Robinson¹, S. Sharma¹⁷, A. Misra¹⁷, F. Rull¹⁸, D. Venhaus¹, P. Bernardi¹⁹, J.-M. Reess¹⁹, A. Reyes-Newell¹, F. Poulet²⁰, N. Lanza¹, I. Torre¹¹, J. Aramendia¹¹, R. Perez²¹, E. Cloutis²², S. Angel²³, D. Mimoun²⁴, R. Lorenz⁹, W. Rapin⁸, P.-Y. Meslin², J. Frydenvang¹², T. McConnochie²⁵, S. Bernard⁴, ¹LANL, ²IRAP, ³USGS, ⁴Institut de Mineralogie, de Physique des Materiaux et de Cosmochimie, ⁵Institut de Planetologie et d'Astrophysique de Grenoble, ⁶NASA JPL, ⁷Centre Nationale de la Recherche Scientifique, ⁸Calif. Inst. of Tech., ⁹JHU/APL ¹⁰Univ. de Malaga, ¹¹Univ. of Basque Country, ¹²Univ. of Copenhagen, ¹³Univ. de Nantes, ¹⁴CSIC-UCM, ¹⁵Stony Brook Univ., ¹⁶Laboratoire Atmospheres, Millieux, Observations Spatiales, ¹⁷Univ. of Hawaii, ¹⁸Univ. of Valladolid, ¹⁹LESIA-Observatoire de Paris, ²⁰Institut d'Astrophysique Spatiale, ²¹CNES, ²²Univ. of Winnipeg, ²³Univ. of South Carolina, ²⁴ISEA-SUPAERO, ²⁵Univ. of Maryland

Introduction: SuperCam is a multi-functional spectroscopy instrument on the Mars 2020 rover. It will remotely analyze the surface using Laser-Induced Breakdown Spectroscopy (LIBS), Raman spectroscopy, Visible-Infrared (VISIR) spectroscopy, and Time-Resolved Luminescence Spectroscopy (TRLS). A color micro-imager (RMI) will provide context images and textural detail (Fig. 1). It will also have a microphone to record the LIBS plasma shock waves and the sounds of Mars [1]. Mars 2020 is expected to launch in July 2020 and begin roving Jezero crater in February 2021.

SuperCam and the Mars 2020 Mission Goals: The primary goals of the Mars 2020 mission are to 1) search for habitable environments, 2) search for signs of past life, 3) cache samples, and 4) prepare for human exploration. SuperCam will address these goals by analyzing the chemistry of the rocks and soils using LIBS for major and trace elements and TRLS for trace elements, determining the mineralogy using VISIR and Raman spectroscopy, and potentially identifying organic materials using Raman, VISIR, and TRL spectroscopy. The microphone may also provide information on rock physical properties and on the martian winds.

Instrument Description: SuperCam consists of a Mast Unit (MU) and a Body Unit (BU). The MU houses the laser (Nd:YAG 1064 nm) for LIBS, the frequency doubling system for the Raman and TRLS laser (532 nm), the infrared spectrometer (spectral coverage from 1.3-2.6 μm), the RMI (70 μrad spatial resolution at the center of the field of view), the microphone, and the telescope and associated optics. The BU consists of a demultiplexer to split and direct the light into two reflection spectrometers (spectral ranges \sim 241-340 nm and 382-469 nm) and a transmission spectrometer (536-853 nm). A set of 31 calibration targets will be positioned at 1.6 m from the MU. The LIBS instrument operates to 7 m from the rover with an analysis spot size of 200-500 μm . Raman and TRLS will operate to 12 m with a spot size of 0.9 mrad. VISIR will operate

to kilometers distances with a field of view of 1.15 mrad.

Development and Testing: SuperCam was developed in stages and the Engineering Qualification Model (EQM) version was tested in 2018. The BU Flight Model (FM) was completed and tested in April and is very similar to the EQM BU in spectral range and resolution. The FM MU is being finalized and therefore the data collected for the preliminary calibration of SuperCam used the FM BU with the EQM MU. There are some improvements of the FM MU compared to the EQM including 1) improved stability of the primary mirror over temperature for better quality LIBS and RMI data, 2) higher quality RMIs due to an improved objective and light path, and 3) a change in the mounting of the Schmidt plate for better alignment of the Raman/TRLS laser. SuperCam software, firmware, alignment, focusing, and other engineering capabilities have been tested and proven successful.

Calibration: In April 2019, SuperCam underwent a significant calibration effort to demonstrate the instrument's capabilities. Over 27,000 LIBS spectra were collected on \sim 300 geological materials (pressed pellets) and more than 100 Raman, 15 TRLS, and 50 VISIR spectra were collected on rocks and minerals.

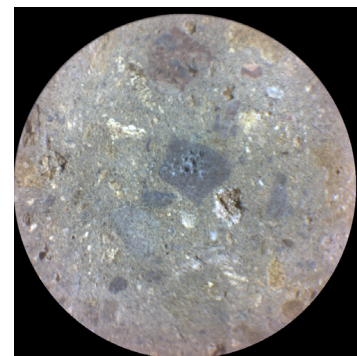


Fig. 1: Example SuperCam RMI of a rock with LIBS analysis pits (\sim 350 μm diameter) on the central dark gray grain. The distance is 2 m and the image is corrected for flat field, contrast, balance, and color.

Full calibration of the FM IR spectrometer will be completed within the next 2-3 months [2].

Synergy between Techniques: An example of how the SuperCam techniques may be integrated to identify a mineral is shown in Fig. 2. This data was collected in 2018 using the EQM BU and MU. The distance was 2 m and samples were under ambient conditions. Ambient conditions have a significant effect on LIBS spectra. Room lights were turned off and VISIR spectra were collected with a 75 W QTH lamp. TRLS spectra consist of 20 spectral co-additions with a 0.5 ms integration time at 3 time delays (730 ns, 53 μs, and 73 μs). Spectra were dark subtracted, wavelength calibrated, and instrument response corrected. The

successful identification of rhodochrosite was made through the combination of all techniques: high Mn from LIBS, IR data consistent with Mn-rich calcite, Raman data consistent with rhodochrosite or calcite, and fast decaying Mn²⁺ and slower decaying Nd³⁺ indicative of rhodochrosite. XRD results confirm rhodochrosite, rhodochrosite, and quartz as the primary mineralogy in this rock. Due to the spot size, it is possible multiple phases were sampled but the rhodochrosite was more prominent in IR, Raman, and TRLS spectra.

References: [1] Wiens et al. (2017) Spectrosc. 32:5, 50-55 [2] Royer et al. (2019) 9th Int. Conf. Mars [3] Lafuente, B. (2015) In: Highlights in Mineralogical Crystallogr., Eds: Armbruster & Danisi.

Fig 2: Example SuperCam EQM data showing the synergy between the SuperCam techniques. Raman library data: RRUFF [3].

