



**HAL**  
open science

## Characterization and sampling of a deep and heterogeneous aquifer -An application to the Paleocene -Eocene aquifer in the Aquitaine basin, France

F. Gal, Jérôme Barrière, Laurent André, Arnaud Wuilleumier

### ► To cite this version:

F. Gal, Jérôme Barrière, Laurent André, Arnaud Wuilleumier. Characterization and sampling of a deep and heterogeneous aquifer -An application to the Paleocene -Eocene aquifer in the Aquitaine basin, France. *Journal of Hydrology*, 2021, 596, pp.126098. 10.1016/j.jhydrol.2021.126098 . insu-03148912

**HAL Id: insu-03148912**

**<https://insu.hal.science/insu-03148912v1>**

Submitted on 22 Feb 2021

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

## Journal Pre-proofs

Research papers

Characterization and sampling of a deep and heterogeneous aquifer – An application to the Paleocene – Eocene aquifer in the Aquitaine basin, France

F. Gal, J. Barrière, L. André, A. Wuilleumier

PII: S0022-1694(21)00145-1

DOI: <https://doi.org/10.1016/j.jhydrol.2021.126098>


Reference: HYDROL 126098

To appear in: *Journal of Hydrology*

Received Date: 20 October 2020

Revised Date: 26 January 2021

Accepted Date: 15 February 2021

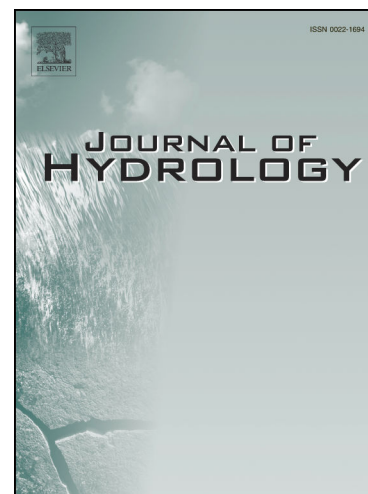

Please cite this article as: Gal, F., Barrière, J., André, L., Wuilleumier, A., Characterization and sampling of a deep and heterogeneous aquifer – An application to the Paleocene – Eocene aquifer in the Aquitaine basin, France, *Journal of Hydrology* (2021), doi: <https://doi.org/10.1016/j.jhydrol.2021.126098>

This is a PDF file of an article that has undergone enhancements after acceptance, such as the addition of a cover page and metadata, and formatting for readability, but it is not yet the definitive version of record. This version will undergo additional copyediting, typesetting and review before it is published in its final form, but we are providing this version to give early visibility of the article. Please note that, during the production process, errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

© 2021 Elsevier B.V. All rights reserved.

1 **Characterization and sampling of a deep and heterogeneous aquifer – An application to the**  
2 **Paleocene – Eocene aquifer in the Aquitaine basin, France**

3

4 **Authors:**

5 F. Gal<sup>1\*</sup>, J. Barrière<sup>2</sup>, L. André<sup>1,3</sup>, A. Willeumier<sup>2</sup>

6

7 <sup>1</sup>: BRGM, 3 Avenue Claude Guillemin, F-45100 Orléans

8 <sup>2</sup>: BRGM, 24 Avenue Léonard de Vinci, F-33600 Pessac

9 <sup>3</sup>: Université d'Orléans, CNRS, BRGM, ISTO, UMR 7327, 45071 Orléans, France

10 \*: corresponding author: [f.gal@brgm.fr](mailto:f.gal@brgm.fr)

**11 Abstract**

12 Groundwater sampling in boreholes has been carried out for decades according to well-established  
13 protocols and regulations. An important requirement in this context is the need to purge the  
14 borehole prior to any sampling action, the volume of the purge being adapted to the water flow and  
15 the regulatory context. Contaminated site investigations have introduced the concept of water  
16 column heterogeneity in the screened section of boreholes, which also occurs in some  
17 uncontaminated boreholes or in long-screened boreholes. Specific guidelines and practices were  
18 thus introduced, in particular the concept of discrete sampling. This type of sampling can be  
19 advantageously used in deep boreholes, provided that there is some renewal of water at the screens  
20 or the perforated intervals. The present study aims to take a step forward in the characterization of  
21 deep boreholes set up in the Aquitaine basin in France, by defining a protocol for relatively short  
22 boreholes (depth < 170 m) and applying it to much deeper boreholes, formerly drilled for oil and gas  
23 exploration (sampling up to 1035 m deep). Acquisitions were performed to better characterize water  
24 chemistry, including some isotope considerations. They were based on physico-chemical logging and  
25 endoscopic inspections where technically possible. After a review of the information provided by the  
26 investigations on the characterization of the Paleocene – Eocene aquifer in southwestern France, a  
27 methodology is proposed to make sampling in deep boreholes with low-yield more reliable, by  
28 combining the abstraction of a reduced water volume and the use of a downhole sampling system.

29

**30 Keywords**

31 Deep borehole – downhole sampling – water sample representativeness

## 32 1. Introduction

33 Water sampling, and especially groundwater sampling in boreholes, which is the focus of this study,  
34 has been performed for decades either for regulatory purposes (water drinking regulations) or for a  
35 better knowledge of aquifers. Best practice guidelines were defined early (*e.g.* Rainwater and  
36 Thatcher, 1960) and have evolved regularly since then, based on feedbacks from field operators and  
37 regulators (*e.g.* Brown *et al.*, 1970; Wood, 1976; Gibb *et al.*, 1981; Lallemand-Barrès, 1993). In  
38 Europe, the focus was placed on best practices thanks to the first regulatory framework for  
39 groundwater in the end of the 1970's (Directive 80/68/EC). Subsequent directives, namely the Water  
40 Framework Directive (WFD) in 2000 (Directive 2000/60/EC) and its daughter directive on  
41 groundwater in 2006 (Directive 2006/118/EC), have completed the corpus. These directives aimed to  
42 achieve good (quantitative and chemical) status for water bodies supposedly by 2015. As a result, a  
43 large literature is available worldwide to help in better sampling and thus characterizing  
44 groundwaters (*e.g.* OFEV, 2003; USGS, 2006; Duncan *et al.*, 2007; Ministère du Développement  
45 Durable, de l'Environnement et des Parcs du Québec, 2011; Ghestem *et al.*, 2017). Moreover, most  
46 of the guidelines are in accordance with those from the ISO standards, and more specifically the 5667  
47 standard and its parts (ISO 5667-11, 2009).

48 One of the main principle exposed in these guidelines is the need of purging a borehole prior to any  
49 sampling (Barcelona and Helfrich, 1986). This is because the water in the screened section is  
50 renewed due to flow patterns but the water above the screened section is not and is therefore not  
51 representative of the groundwater (US-EPA, 1999). In most cases, the flow pattern in the screened  
52 section is lateral and directly related to that of the aquifer as a function of its transmissivity, but well-  
53 bore flow (vertical mixing) may occur especially in open holes and boreholes with long or multiple  
54 screened sections (USGS, 2006). Additionally, water sampling from boreholes that cannot produce a  
55 continuously pumped sample or boreholes in which water-level recovery takes longer than 24 hours  
56 after being pumped is not recommended (USGS, 2006). Apart from these cases, the general rule is to  
57 evacuate at least one volume of water in the well casing, and preferably three to five volumes, to get

58 a representative sample (US-EPA, 1999). Depending on the flowrate of the pump, the pump intake  
59 will be located either above the screened section (high flow-rate pump) or in the screened section  
60 (low flow-rate pump) in order to avoid damaging screens and displacing the gravel-pack.

61 Besides these guidelines, several exceptions to the rule exist, for example on contaminated sites  
62 where volatile organic compounds may be monitored (Barcelona *et al.*, 1994) or in open holes in  
63 fractured bedrock (Shapiro, 2002). In such cases, other pumping strategies may be required because  
64 sampling results have been demonstrated to be sensitive to well-purging rate, the volume of  
65 abstracted water and the disturbance created by downhole pumping (Gibb *et al.*, 1981). From an  
66 assumption of homogeneity of the water column in the screened section, the view progressively  
67 shifted to the highlight of the role of heterogeneity in the water column, as in geological logs (Puls  
68 and Barcelona, 1996). This led to the development of low-flow purging techniques (Puls and Powell,  
69 1992), which have demonstrated their usefulness in small-diameter boreholes equipped with short-  
70 screened intervals (Barcelona *et al.*, 1994, 2005), and to the use of inflatable packers where screened  
71 intervals are long or in open holes (Smellie and Wikberg, 1991; Shapiro, 2002). Later on, other  
72 systems for discrete sampling at low-flow have been designed: the Model 401 Waterloo Multilevel  
73 System (Solinst®; Cherry and Johnson, 1982), the Continuous Multichannel Technology system  
74 (Solinst®; Einarson and Cherry, 2002), the Water FLUTE™ (Flexible Liner Underground Technologies,  
75 Ltd. Co; Cherry *et al.*, 2007) or the Westbay MP system (Westbay Instruments Inc.; Black *et al.*, 1986).

76 Such sampling systems are mostly used in shallow boreholes (<100 m) and benefit from a large  
77 number of sampling points allowing discrete and precise characterization of the water column  
78 (Chapman *et al.*, 2015). Nevertheless, some of these systems have a far larger investigation depth  
79 (up to 1200 m for the Westbay system; Einarson, 2005). These systems appear to be relevant for site-  
80 specific borehole monitoring, but they require dedicated borehole completions. In the case of pre-  
81 existing boreholes, implementing such systems may turn out to be costly (*i.e.* if there is no need of  
82 permanent or regular monitoring of the aquifer), provided the borehole diameter is adapted  
83 (Einarson, 2005).

84 When the depth of investigation has to be further extended, the use of multi-ports systems is less  
85 common, with the exception of the U-tube sampling system, a positive fluid displacement pump  
86 using a high pressure gas drive and valves, designed for Carbon Capture and Storage applications and  
87 operated through a dedicated completion (Freifeld *et al.*, 2005). The U-tube system was deployed  
88 down to 2870 m (Conaway *et al.*, 2016) and nested deployments allowing multi-level sampling are  
89 also reported (Boreham *et al.*, 2011). If the sampling system has to be retrievable, sampling may rely  
90 on downhole (in-situ) sampling systems. The use of electric submersible pumps and sampling  
91 systems used in the oil industry is not considered for cost reasons (Crombie *et al.*, 1998; Wolff-  
92 Boenisch and Evans, 2014). Downhole sampling systems are namely positive displacement samplers,  
93 vacuum samplers and flow-through samplers (Wolff-Boenisch and Evans, 2014). These samplers need  
94 to be driven down to the desired sampling depth with a wireline, and valve mechanisms allow fluid  
95 sampling by means of pressure differential (positive displacement and vacuum samplers) or not  
96 (flow-through sampler).

97 We present here the results of investigations performed on some deep boreholes of the Aquitaine  
98 Basin, in southwest France, between 2014 and 2018. The acquisitions were not all done under the  
99 same project so that focus and outcomes may differ from one well to the other. Deep sampling was  
100 always performed, to characterize the water chemistry (characterization of the gas contents is not  
101 presented here). In some cases, physico-chemical logging was performed prior the investigations, to  
102 assess the evolution of parameters along the water column in boreholes that are not used for water  
103 supply. Some pumping phases were also done in selected boreholes, to evaluate if relevant deep  
104 sampling can be performed without any well-bore purging or not. Though the data were acquired to  
105 improve the knowledge on deep aquifers in this large sedimentary basin, they are mainly used to  
106 define an approach to get reliable estimates of the chemistry of deep aquifers and therefore to set a  
107 methodological approach for further investigations in similar boreholes.

108

## 2. Hydrogeological settings and boreholes description

The surveyed boreholes are located in the southern part of the Aquitaine basin. Two boreholes (Labruguière, LBG and Valdurenque, VLD) are located close to the eastern border of the basin, and were drilled in 1990 for water monitoring down to respectively 177 and 129 m depth (Figure 1). They are equipped with stainless steel screened sections so the water flow is supposed to be better constrained. The three other boreholes are old and deep wells initially drilled for oil exploration the second half of the XX<sup>th</sup> century (André *et al.*, 2005). These wells were generally drilled to some kilometers depth. They were converted later into groundwater monitoring boreholes by sealing their lower parts and by perforating the casing at a selected depth interval (Roche, 1977). For example, Polastron (PO-101) well was drilled in 1957 down to 2751 m depth and is now perforated at only 818.5-828.5 m depth (Figure 1), *i.e.* there is no more water flow from horizons deeper than 828.5 m (obstruction at 951.4 m depth). Muret-104 (MU-104) well is perforated at 1031.6-1040 m depth and Lacquy (LC-101) well is perforated at 435-445 m depth.

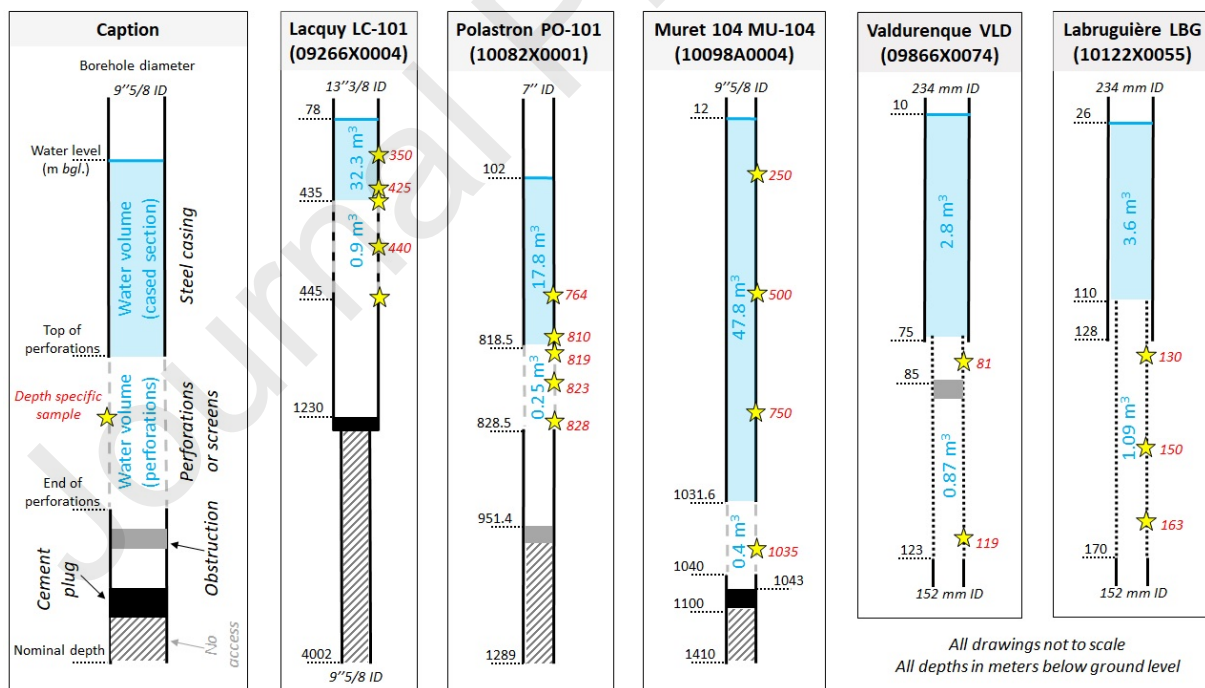


Figure 1: boreholes geometry with location of the screened sections or the perforations; the volumes reported in blue correspond to water volumes in the selected casing section; the yellow stars indicate the depths of sampling with GOG in this study.



126

127 In the former oil exploration wells (PO-101, MU-104 and LC-101) water flows locally through  
128 perforations in the steel casing but the water flow is less constrained than in screened intervals  
129 because perforations were made using isolated explosive charges and the connectivity to the aquifer  
130 can be variable from one borehole to the other. Nevertheless, their long-term water table  
131 monitoring suggests that some hydraulic connectivity to the aquifer remains. Last, as the casing  
132 material is steel, sampling depths have to be considered with care regarding the potential influence  
133 of corrosion on water quality if water is not renewed (Pohlmann and Alduino, 1992).

134 The studied boreholes tap one of the major aquifer system of the Aquitaine basin, the FG082 aquifer  
135 (ADES, 2020) formed by sands, limestones and dolomites of Paleocene to Eocene age. This aquifer is  
136 one of the main water resources in the basin and is used for several applications over its wide extent:  
137 drinking water, irrigation, thermal and hydrothermal resources and gas storage in aquifer (André *et*  
138 *al.*, 2002, 2005; Brenot *et al.*, 2015). Most of this FG082 aquifer (99.3% of its surface) is confined. This  
139 aquifer has highly variable chemical characteristics in relation with a variety of lithologies and a large  
140 range of depth (from tens of meters to several hundreds). This Paleocene to Eocene aquifer encloses  
141 indeed aquifer formations from Danian (limestone) and Selandian (sandstone and gravel sands) ages,  
142 which are tapped below 1500 m depth in the center of the basin, and aquifer formations from the  
143 Ypresian to Lutetian age, which are tapped by LC-101, PO-101, MU-104 and LBG at lower depths  
144 (Figure 1). The Ypresian to Lutetian aquifer is also called the infra-molassic sand aquifer and is  
145 formed by sands and gravels with possible minor intercalations of sandy clays. Last, the VLD borehole  
146 taps slightly younger formations from the Lutetian age (so called “gravel clays”).

147 Little information is known on the hydraulic properties of the deep boreholes tapping the Paleocene  
148 – Eocene aquifer – with the exception of water table monitoring data that are not discussed here  
149 (SIGES AQI, 2020). On the three deep boreholes, information is available for MU-104 (BSS EAU,  
150 2020a) and to a lesser extent for PO-101 (Berard and Sourisseau, 1998). The storage coefficient of

151 MU-104 at *c.a.* 1000 m in the infra-molassic sands is only  $1.5 \times 10^{-4}$  thus confirming the confined  
152 character of the aquifer. The transmissivity ( $1.8 \times 10^{-5} \text{m}^2 \cdot \text{s}^{-1}$ ) and the estimated permeability (  
153  $1.0 \times 10^{-6} \text{m} \cdot \text{s}^{-1}$ ) are low too for MU-104 borehole. The yield rate of PO-101 was not evaluated by  
154 pumping during its conversion into a piezometer but by the means of swabbing that again suggested  
155 a low productivity (AFBAG, 1974). The two shallower boreholes (LBG and VLD) have storage  
156 coefficients of  $1.0 \times 10^{-2}$ , suggesting that the confined character exists even close to the recharge  
157 area. The productivity is also low (transmissivities of  $6.5 \times 10^{-5} \text{m}^2 \cdot \text{s}^{-1}$  for LBG and  $5.0 \times 10^{-5} \text{m}^2 \cdot \text{s}^{-1}$   
158 for VLD).

159 As for hydraulic properties, only little information is available on water quality at depth and most of  
160 the available data are for equipped boreholes. Deep sampling in such boreholes is publicly reported  
161 only once, together with physico-chemical characterization of the water column, but far above the  
162 perforations (Négrel *et al.*, 2008).

163

### 164 **3. Methods**

#### 165 **3.1 Borehole characterization**

166 Because the integrity of old boreholes is poorly constrained, endoscopic (camera) inspections were  
167 completed in some boreholes (LC-101 and PO-101) prior to any other investigation, in order to check  
168 borehole integrity. This diagnostic has not been done in the shallower boreholes (LBG and VLD),  
169 because they benefit from better knowledge. Physico-chemical logging has been done in LBG and  
170 VLD (by BRGM) and in LC-101 and PO-101 (by a subcontractor, Hydro-Assistance). Physico-chemical  
171 logging has been done first under natural flow conditions and, if possible, during and/or after  
172 pumping, in order to help in locating the water inflows in the boreholes. Probes used were Idronaut  
173 303 or 316 models equipped with pressure, temperature, electrical conductivity, pH, redox and  
174 dissolved oxygen sensors. No endoscopic or physico-chemical logging were done in MU-104.

175

### 176 **3.2 Pumping**


177 The strategy of pumping also differed from boreholes to others. There was no pumping in MU-104.  
178 Sequential pumping was performed in the shallow boreholes (LBG and VLD) using a 2 inches pump  
179 (max. flow rate  $<2 \text{ m}^3 \cdot \text{h}^{-1}$ ). A larger pump (4 inches) was used by the subcontractor to produce water  
180 from PO-101 (flow rate:  $4.3 \text{ m}^3 \cdot \text{h}^{-1}$ ) and LC-101 (flow rate:  $4 \text{ m}^3 \cdot \text{h}^{-1}$ ).

181

### 182 **3.3 Deep sampling**

183 Deep sampling was performed using the BRGM GOG (for Gaz-O-Gaz) proprietary system (Gal *et al.*,  
184 2014, 2017). Like the U-tube system (Freifeld *et al.*, 2005), the GOG sampling system is based on the  
185 use of ball check-valve operated by pressure of a neutral gas (nitrogen). The gas pressure is applied  
186 to the drive leg, and the sample is collected from a second leg, the sample leg (Figure 2). Unlike the  
187 U-tube system, the GOG system is a mobile and retrievable system, made of flexible tubing  
188 (polyamide), which can be lowered to any depth in a borehole. If the system is operated several  
189 times in a borehole, logging-like information can be obtained. This allows *e.g.* performing several  
190 sampling in a perforated horizon. In order to optimize the efficiency of valve functioning and to  
191 operate with reasonable gas pressure, the ball check-valve is deployed under 250 m of water column  
192 at maximum. The nitrogen pressure to apply to get water flowing at the surface is thus 25 bars plus  
193 some additional bars linked to pressure losses, in the range of admissible pressure of the flexible pipe  
194 (working pressure 25 bars; burst pressure 50 bars). Below the ball check-valve, a unique leg, with a  
195 ballast, is deployed down to the desired sampling depth. It acts as a straw: when deployed, it fills  
196 with water from the entire water column. A purging phase is thus needed to get water from the  
197 horizon to be sampled. In case of little depth changes from one location in the borehole to the other,  
198 the geometry of the GOG system is fixed and defined prior the investigations (Figure 2). In case of  
199 large interval between the sampling depths (MU-104), the system is retrieved at the surface, and its  
200 geometry adapted, between each use of the system. By geometry, the GOG system has an internal

201 capacity of 1.25 L per 100 m of leg deployed under the water level. The total volume of water is thus  
 202 2.5 L per 100 m between the valve and the water level. The duration of a cycle, *i.e.* the time between  
 203 the end of one water flow and the following one, is 15 minutes; Figure 2 describes the working  
 204 principle of the GOG system.

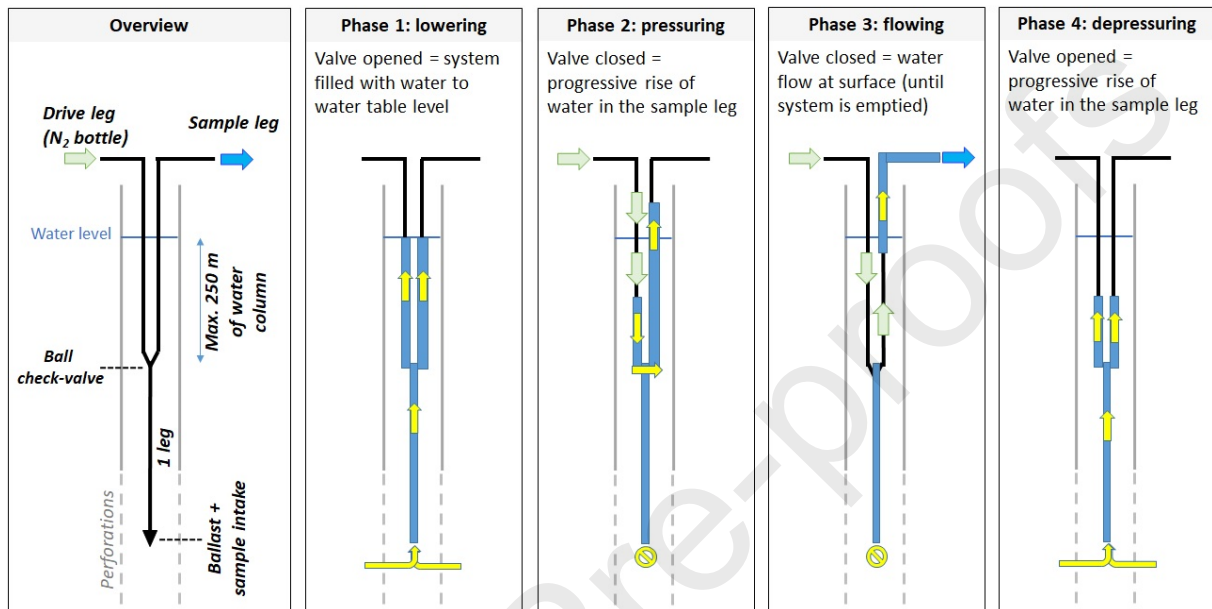

205  
 206 Figure 2: principle of sampling using the GOG system: from left to right: generic scheme of a GOG  
 207 deployment in a borehole; working principle in four steps: 1: lowering of the system in the borehole  
 208 (valve open); 2: nitrogen pressuring (closing of the valve and initiation of fluid ascent in the sample  
 209 leg); 3: fluid production from the sample leg until the drive and sample legs are emptied; 4: valve  
 210 opening by pressure release (initiation of water ascent in the drive and sample legs, from the leg  
 211 deployed below the valve; after completion, the system is in step 1 configuration).

212

### 213 **3.4 Laboratory analyses**

214 Major elements were analysed for LBG, VLD, LC-101, MU-104 and PO-101. Trace elements were  
 215 analysed for LBG, VLD, LC-101 and PO-101. Samples were filtrated (0.45  $\mu\text{m}$ ) on site and acidified  
 216 when required.

217 Isotopes of the water molecule ( $\delta^{18}\text{O}$  and  $\delta\text{D}$ ) and isotope of the sulfates ( $\delta^{18}\text{O}_{\text{SO}_4}$  and  $\delta^{34}\text{S}_{\text{SO}_4}$ ) were  
218 determined for MU-104 and PO-101 (the characterization of LC-101 samples is not discussed here).  
219 Other isotope characterizations were done for LC-101 and PO-101 and are discussed by Barrière *et al.*  
220 (2019).

221

## 222 **4. Results**

### 223 **4.1 Endoscopic inspection**

224 Prior characterizing groundwater using depth specific sampling, it is important to get as many  
225 information as possible about the well completion. In that perspective, endoscopic inspections were  
226 performed in LC-101 and PO-101. Camera investigations were stopped prematurely in LC-101  
227 because an oil supernatant was observed above the water table. A skimming pumping of 4 m<sup>3</sup> had  
228 therefore to be done.

229 The PO-101 borehole has been investigated down to the perforated horizon. The video record  
230 showed a casing in relatively good conditions, with minor oxidation above the water level. Some  
231 scalings are visible above the perforated section and over the perforations (818-829 m). The  
232 borehole is obstructed at 951 m, possibly by sediments from the above perforations.

233

### 234 **4.2 Pumping and physico-chemical logging**

235 Because it is important to assess if deep boreholes can be used for deep sampling and subsequent  
236 chemical characterization, whatever their use, some of them were investigated more in details in  
237 order to better understand their own dynamics. These investigations were done in two-steps. Step-1  
238 characterizations enclose well logging at equilibrium conditions and deep sampling, then followed by  
239 pumping and a second deep sampling session at the levels previously monitored. This approach was  
240 used first in the shallow boreholes LBG and VLD, in order to define the best approach, and then at  
241 PO-101. For Step-2 characterizations, deep sampling is only performed after pumping (LC-101). This

242 approach was not used at MU-104, where deep sampling was performed without any preliminary  
243 characterization.

244

#### 245 **4.2.1 Boreholes characterized before and after pumping – shallow wells**

246 The results of physico-chemical logging of the shallow LBG and VLD boreholes are given in Figure 3.  
247 Only one logging operation was previously reported in LBG borehole (Négrel *et al.*, 2006), but only  
248 down to 100 m bgl., *i.e.* in the cased section, so that no information exist on the physico-chemical  
249 evolution in the screened section.

250 Albeit the LBG and VLD boreholes are shallow, they have a specific response to pumping, directly  
251 linked to their transmissivities. The LBG borehole cannot be pumped at high flow-rate. During the  
252 investigations, the maximum flow-rate was  $1.1 \text{ m}^3 \cdot \text{h}^{-1}$  and it induced a drawdown of 19 m in 3 hours.  
253 The pumping had then to be stopped to prevent dewatering of the submersible pump. The water  
254 level recovery after pumping is slow, with +9 m in 3 hours. The VLD borehole was pumped at a  
255 slightly higher flow-rate ( $2 \text{ m}^3 \cdot \text{h}^{-1}$ ) and the maximum drawdown was 8 m in 4 hours. The rise in water  
256 level after pumping is faster, with +6 m in 15 minutes.

257 As earlier mentioned, the LBG and VLD boreholes were logged several times prior, during and after  
258 pumping. For each borehole, the pumping was operated over 3 days, with periods of rest. In LBG, 7.3  
259  $\text{m}^3$  were abstracted in 8.5 hours, representing 1.6 times the volume of the water column. In VLD,  
260  $14.6 \text{ m}^3$  were abstracted in 9 hours, representing 3.5 times the volume of the water column. These  
261 values are in line with those recommended for getting a representative sample (*e.g.* US-EPA, 1999)  
262 but they were reached over a 3-days period, which underlines the very low productivity of VLD and  
263 especially LBG boreholes. As these boreholes are punctually surveyed for water quality purposes, a  
264 better understanding on the way they behave is thus important.


265 Under natural flow conditions (Figure 3), LBG had a linear temperature profile with an increase of  
266  $2.97^\circ\text{C}/100 \text{ m}$ , very close to the mean geothermal gradient. No thermal gradient could be seen from

267 10 to 30 m below ground level in VLD and the measured gradient under 30 m was lower than at LBG  
268 with a mean value of 2.44°C/100 m. This may be related to different ground conditions, the existence  
269 of shallower aquifers, which modifies the local gradient at VLD. The pH and redox evolution of LBG  
270 and VLD were similar, with pH values higher and redox values lower in the cased section, probably  
271 because of interaction with steel. The shape of electrical conductivity curves was different: there was  
272 no change between the cased section and the screened section in VLD, whereas the electrical  
273 conductivity was higher in the cased section of LBG. Again, for LBG, this argues for interaction with  
274 the casing. For VLD, it may suggest the existence of well-bore flow as may be postulated with the  
275 temperature log. Both dissolved oxygen values were close to zero in the cased section and this  
276 remained only valid in the screened section for LBG. For VLD, there was some remaining dissolved  
277 oxygen in the aquifer. The fact that oxygen did not exist in the cased section of VLD does not argue  
278 for well-bore flow.

279 The shape of the profiles evolved when the boreholes were pumped sequentially (Figure 3). The  
280 progressive renewal of water in the cased section was particularly well illustrated for LBG. The  
281 electrical conductivity, pH and redox profiles became vertical from bottom to top, further suggesting  
282 that the water inflow was mostly originated from the bottom part of the screened section (the last  
283 20 m). . From the electrical conductivity profile, it may be inferred that the renewal of 1.6 times the  
284 volume of the water column (7.3 m<sup>3</sup>) is the lowest admissible limit for column renewal because the  
285 conductivity at 45 m depth is still 5% higher than the conductivity at 150-170 m depth. Any lower  
286 abstracted volume may lead to erroneous characterization of the aquifer water, as shown by the  
287 conductivity profile obtained after the purge of 1.6 m<sup>3</sup> (*i.e.* after 1.5 hours of pumping). This is a  
288 demonstration of the need to purge boreholes even if they have low water production when  
289 sampling is done by pumping.

290 This pumping phase is less critical for VLD borehole. Indeed, the electrical conductivity profile was  
291 already vertical prior to pumping, and the situation remains the same when pumping. The pH, redox

292 and dissolved oxygen profiles did also verticalize albeit there was a rise of the oxygen data in the  
 293 upper section of the casing probably related to air intrusion in the borehole. The location of the  
 294 water inflow was again in the lower part of the cased section. A closer look to the conductivity profile  
 295 and especially the temperature profile infers that the thermal profile was a step profile, horizons of  
 296 stable temperature alternating with horizons of steep gradient as indicated by the arrows on Figure  
 297 3. Horizons characterized by temperature step gradient are logically productive levels, suggesting  
 298 that water inflow in VLD is the result of the mixing of several productive levels (at least 3).

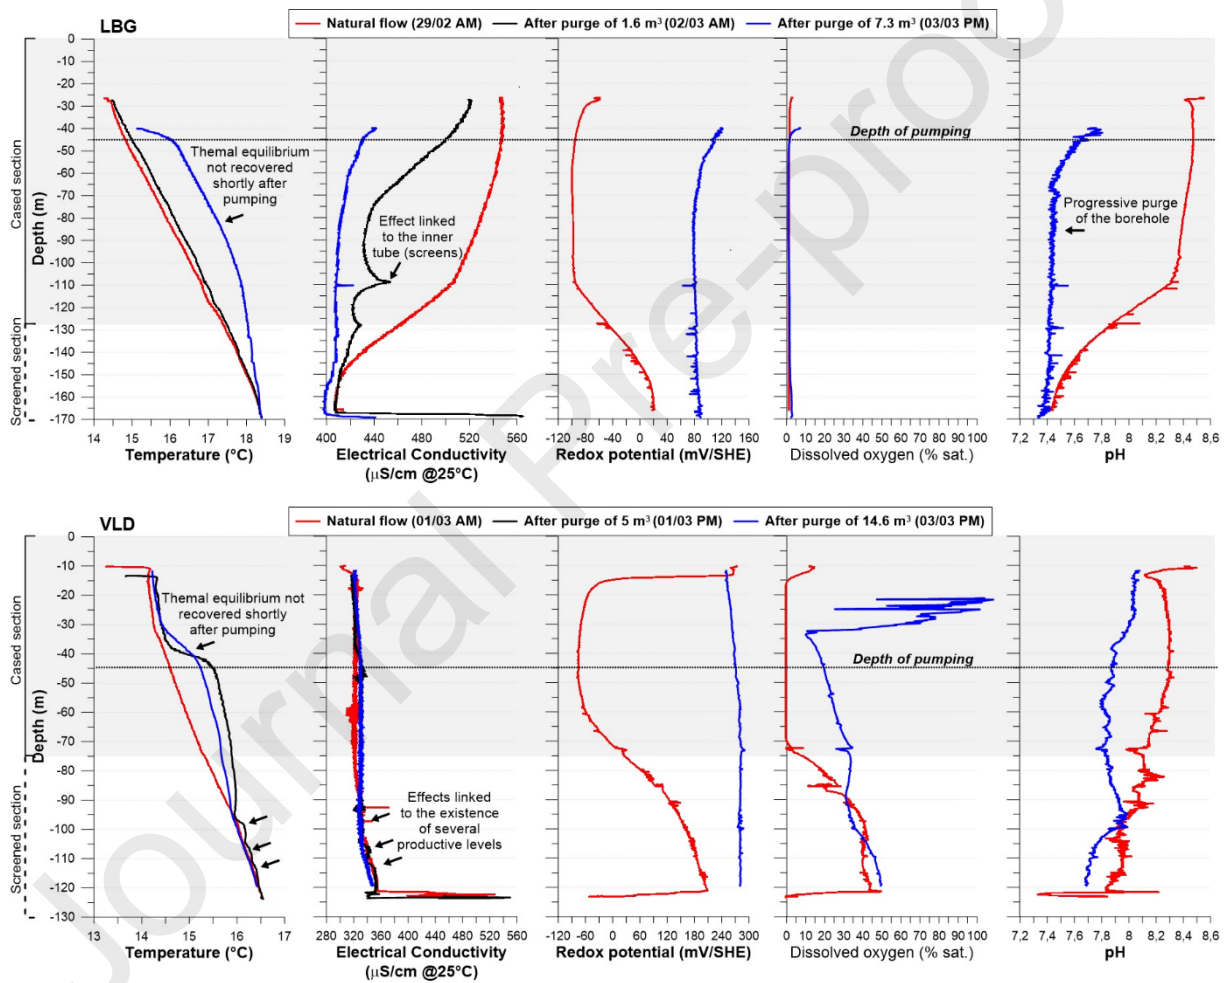

299

300 Figure 3: physico-chemical logging of LBG and VLD boreholes. Log under natural flow in red, log after  
 301 pumping in blue. An intermediate logging step is plotted in black.

302




**303 4.2.2 Boreholes characterized before and after pumping – deep wells**

304 The results of physico-chemical logging of the deep PO-101 borehole are given in Figure 4. Under  
305 natural conditions, PO-101 showed a nearly vertical profile of the electrical conductivity down to 780  
306 m depth with values slightly increasing from 1020 to 1170  $\mu\text{S}\cdot\text{cm}^{-1}$  (at 25°C). Correlatively the pH  
307 increased from 8.6 to 9.4. The redox potential was reducing, in accordance with the absence of  
308 dissolved oxygen. Such profiles characterize the interaction of a stagnant water with the steel casing.  
309 These profiles argue for the absence of casing failure as already suggested by the video inspection.  
310 Additionally, there is no developed upward migration of water from the bottom to the surface. The  
311 thermal gradient is linear, demonstrating that there is no influence of water migration outside the  
312 casing. This gradient is consistent with the mean geothermal gradient (3.2°C/100 m). The physico-  
313 chemical logging demonstrates that the water inflow is originated from horizons below 780 m depth,  
314 likely from the perforated interval. This water inflow is particularly noticeable on the electrical  
315 conductivity data (Figure 4). Within a few meters (from 815 to 828 m), the value of the electrical  
316 conductivity doubles to reach 2300 to 2400  $\mu\text{S}\cdot\text{cm}^{-1}$ . In the meantime, the value of the pH decreases  
317 to 8.2. The temperature gradient is also locally perturbed in the 780 – 840 m depth interval,  
318 suggesting that some water circulates outside the casing between the Ypresian formation, the base  
319 of which is tapped by the perforations, and the underlying Paleocene aquifer and/or the overlying  
320 Lutetian formations.

321 Based on this log, it may be inferred that deep sampling performed without any borehole stimulation  
322 can bring water representative of the formation water in PO-101. The log performed after pumping  
323 corroborates this observation. A volume (17.2 m<sup>3</sup>) slightly greater than that of the water column  
324 between the pump (set at 150 m depth) and the perforations (16.5 m<sup>3</sup>) was abstracted in 4 hours  
325 (Figures 1 and 4). After pumping, the water column is entirely renewed as indicated by vertical  
326 electrical conductivity, pH and redox logs. The temperature log is modified by the action of pumping  
327 as warmer water is progressively drained from depth to the pump intake. All these data point to the  
328 absence of water inflows above the perforated interval. Below this interval, the physico-chemical

329 parameters are not modified, indicating that the bottom-hole is not productive. The perforated  
 330 interval is thus the only water provider in PO-101 borehole.

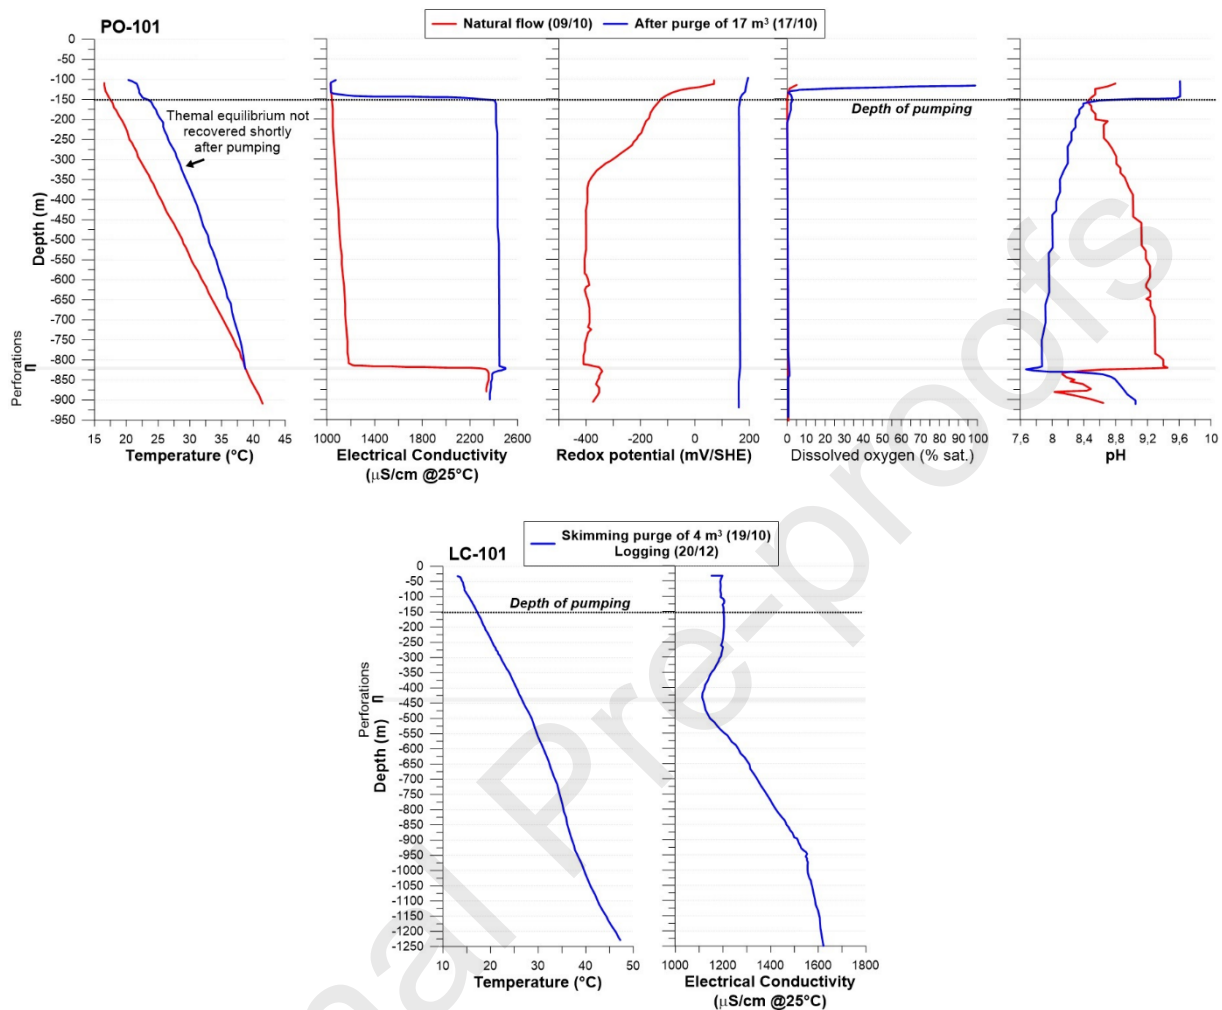

331  
 332 Figure 4: physico-chemical logging of PO-101 and LC-101 boreholes. Log under natural flow in red, log  
 333 after pumping in blue.

334

#### 335 4.2.3 Boreholes characterized only after pumping

336 The LC-101 borehole was purged to skim the oil supernatant and no physico-chemical logging could  
 337 be done before this action. The water column was logged with a rugged device equipped with only  
 338 temperature and conductivity sensors two months after the skimming purge.

339 Figure 4 shows the result of this logging. The temperature profile is similar to a natural profile,  
340 without pumping because the temperature gradient between the static level and 600 m depth is  
341 linear (+3.2°C/100 m). Between 600 and 900 m depth, the gradient is lower (+1.9°C/100 m) and it  
342 goes back to geothermal gradient below (+3.1°C/100 m from 900 to 1200 m depth). This suggests  
343 that some water movement exists outside casing between 600 and 900 m, but the perforated  
344 interval is supposed to be well above (430-440 m; Figure 1). At this perforated level, the electrical  
345 conductivity profile reached its lowest value (close to 1100  $\mu\text{S}\cdot\text{cm}^{-1}$ ; Figure 4). This was likely a  
346 consequence of a water inflow, which penetrates the borehole at the perforations' level. The  
347 conductivity profile above 430 m was smoothed compared to profiles obtained shortly after  
348 borehole purging (Figure 4) because of diffusive processes inducing the occurrence of a chemical  
349 gradient between low mineralized waters (from the perforations) and more mineralized waters (in  
350 the cased section). Below 440 m, the conductivity progressively increased up to 1600  $\mu\text{S}\cdot\text{cm}^{-1}$  around  
351 900 m depth, depth from where the conductivity value varies little. Such a profile does not argue for  
352 the existence of other inflows at depth.

353

#### 354 **4.3 Water chemistry**


355 Major elements and trace elements analyses are given in supplementary information for depth  
356 discrete samples and for samples obtained by pumping (LBG and VLD boreholes). Chemical balance  
357 of the analyses is between -3% and +1%.

##### 358 **4.3.1 Quality of the depth specific samples**

359 An assessment of the representativeness of the samples acquired during the deep sampling  
360 operations, and therefore a way to get a quality control on these depth specific samples, is given in  
361 Figure 6. This figure compares, for the LBG borehole and for some parameters and dissolved  
362 elements concentrations, the results obtained using the GOG system and the results obtained using  
363 the classical pumping approach (pump set at 45 m depth; Figure 1). The first two discrete samples at

364 130 and 163 m depth were taken without any wellbore purging with a circulation of respectively 10 L  
365 and 30 L of water in the system prior to sampling. The electrical conductivity therefore represents  
366 the conductivity existing at 130 and 160 m depth under natural flow conditions (Figure 3). When  
367 some wellbore purging is done, the water column homogenizes in the screened section and  
368 subsequent depth specific samples have minor variability in conductivity and dissolved elements  
369 (Figure 5). Depth specific samples are thus representative of the chemistry of their respective depths  
370 at the time they were taken. In the present case, this may suggest that the 130 m depth horizon has  
371 a higher conductivity and is slightly more enriched in K than the 160 m depth horizon. These  
372 differences disappear after the first purge of 1.6 m<sup>3</sup> confirming that the 130 m depth horizon is not  
373 representative of most of the water from the aquifer. Secondly, there is minor variability of the  
374 depth discrete samples taken when some water is abstracted from the borehole, indicating that  
375 there is no contamination by the sampling system. This is illustrated by the major and trace  
376 concentrations measured at 160 m depth, which are invariant for all the samples whatever their time  
377 of collection, before or after purging.

378 As expected, the representativeness of samples obtained by pumping is much longer to obtain. The  
379 abstraction of large volumes of water is required first to purge the volume of water between the  
380 pump and the top of the screens in the cased section. This purge operates like the movement of a  
381 piston, with renewed water gradually moving upward from the screened section to the cased  
382 section. Consequently, the purge of more than 4 m<sup>3</sup> is required to get water samples that have a  
383 similar composition than that obtained by discrete sampling at depth (Figure 5). For some trace  
384 elements, even the purge of more than one water column volume is not sufficient to achieve  
385 representativeness, as illustrated by Sr and especially Mn concentrations. For these two elements,  
386 depth discrete sampling gives more precise information, perhaps indicating the existence of some  
387 heterogeneities in the aquifer to which pumping actions are blind.

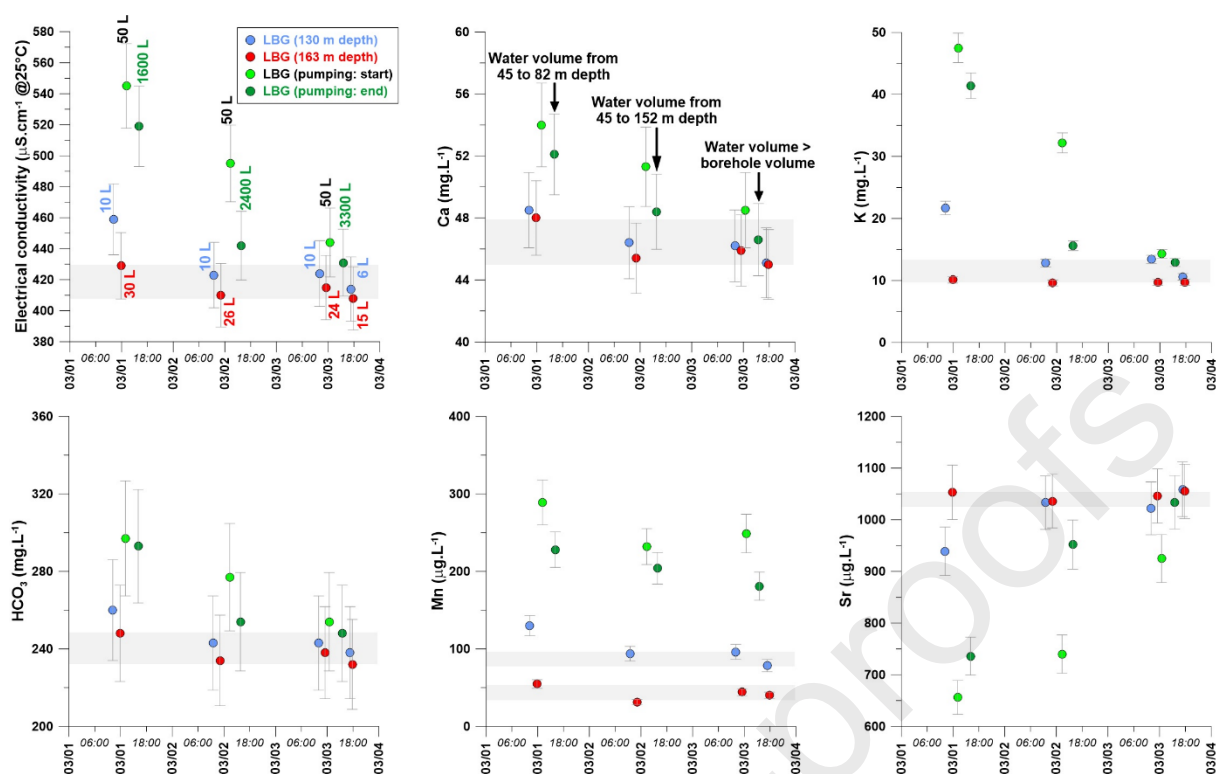

388  
 389 Figure 5: comparison of electrical conductivity, Ca, K, HCO<sub>3</sub>, Mn and Sr concentrations acquired  
 390 during discrete sampling and during pumping (LBG borehole). The volumes reported for depth  
 391 specific samples correspond to the volume of water purged at the depth of sampling prior sampling  
 392 action. The volumes reported for pumping correspond to sampling shortly after pump start and to  
 393 sampling after some m<sup>3</sup> were purged. The grey fields show the variability of the data for the depth  
 394 specific samples (the first sample taken at 130 m depth is excluded – see text for explanations).

### 396 4.3.2 Water chemistry

397 There is a clear connection between the depth of the screened section or the perforated interval and  
 398 the mineralization of the fluid (Supplementary information). The shallowest borehole (VLD) has the  
 399 lowest mineralization (Total Dissolved Solids equivalent to 280 mg.L<sup>-1</sup>) and the deepest one (MU-104)  
 400 the highest (TDS of 2920 mg.L<sup>-1</sup>). Two groups can be identified: low concentrated waters (TDS < 420  
 401 mg.L<sup>-1</sup>), with dominant Ca-Mg and HCO<sub>3</sub>, and more mineralized waters (TDS > 630 mg.L<sup>-1</sup>), with  
 402 dominant Ca and Cl-SO<sub>4</sub>. Only the VLD samples have measurable, but low, NO<sub>3</sub> amounts, indicating  
 403 that nitrate has not been completely reduced. This is in agreement with the slightly oxidant character

404 of the water. The overall trend is an increase in mineralization with depth, which is a classical trend in  
405 groundwaters in large sedimentary basins, mineralization being generally associated to longer  
406 residence time and more interaction with the aquifer matrix.

407 Also, a connection can be seen between the depth of the water inflow and the content in trace  
408 elements and especially elements sensitive to water-rock interaction processes. The content in Sr  
409 increases from 770  $\mu\text{g.L}^{-1}$  at VLD to 3700  $\text{mg.L}^{-1}$  at MU-104. Salinity indicators such as B or Br (when  
410 measured) follow the same trend. Conversely, higher concentrations in Li can be seen in LBG, greater  
411 than in MU-104 (306 and 234  $\mu\text{g.L}^{-1}$  respectively), suggesting an interaction with Li-rich rock matrix in  
412 relatively shallow environment.

413

#### 414 **4.4 Isotopes**

415 Some isotope measurements were done on the samples collected in the deep boreholes  
416 (Supplementary information). Sulfur and oxygen isotopes of the dissolved sulfates and hydrogen and  
417 oxygen isotopes of the water molecule were analyzed for MU-104 and PO-101. Sampling was  
418 performed before and after pumping in PO-101 in order to determine if some variations occur when  
419 the borehole is partially purged. The values are the same before and after pumping, suggesting that  
420 direct deep sampling at the perforated depths can provide representative information at least for  
421 these isotopes.

422 The samples performed at several depths in MU-104 provide further information about  
423 representativeness along the water column, especially at depths far from the perforated interval.  
424 There is almost no change along the water column for oxygen and hydrogen isotopes of the water  
425 molecule considering the uncertainty on the measurement. At the opposite, there is significant  
426 variation for the sulfates, especially for the sulfur isotopes and to a lesser extent for the oxygen  
427 isotopes. When the sampling is performed at the level of the perforations (1035 m), the volume of

428 water purged during deep sampling seems to have no influence on the result and this result probably  
429 reflects the real value of sulfur isotopes in the aquifer.


430

## 431 **5. Discussion**

### 432 ***5.1 Certainties and uncertainties in the characterization of the Paleocene – Eocene aquifer***

433 The goal is not to get an in-depth description of the water-rock interactions processes but rather to  
434 determine to what extent the new acquired data can be included in existing databases and if they  
435 put light on new findings.

436 Data from VLD borehole match the ideal expectations for the functioning of a borehole (Figure 6;  
437 Supplementary information). There is minor difference from one sample to the other whatever the  
438 monitoring approach and the depth of sampling. The data are in good agreement with those  
439 reported just after the borehole was completed (BSS EAU, 2020b). Provided the sampling material is  
440 in good condition and some water renewal is allowed prior to sampling, investigations in such a  
441 borehole are likely to bring representative samples when using a pump. A similar observation can be  
442 made if the water is sampled using a deep sampling system provided it is deployed in the screened  
443 interval. The best fit between deep sampling and pumping is obtained after one purging session (one  
444 water column volume), suggesting that some enhanced water production may be needed to renew  
445 the water column at depth.

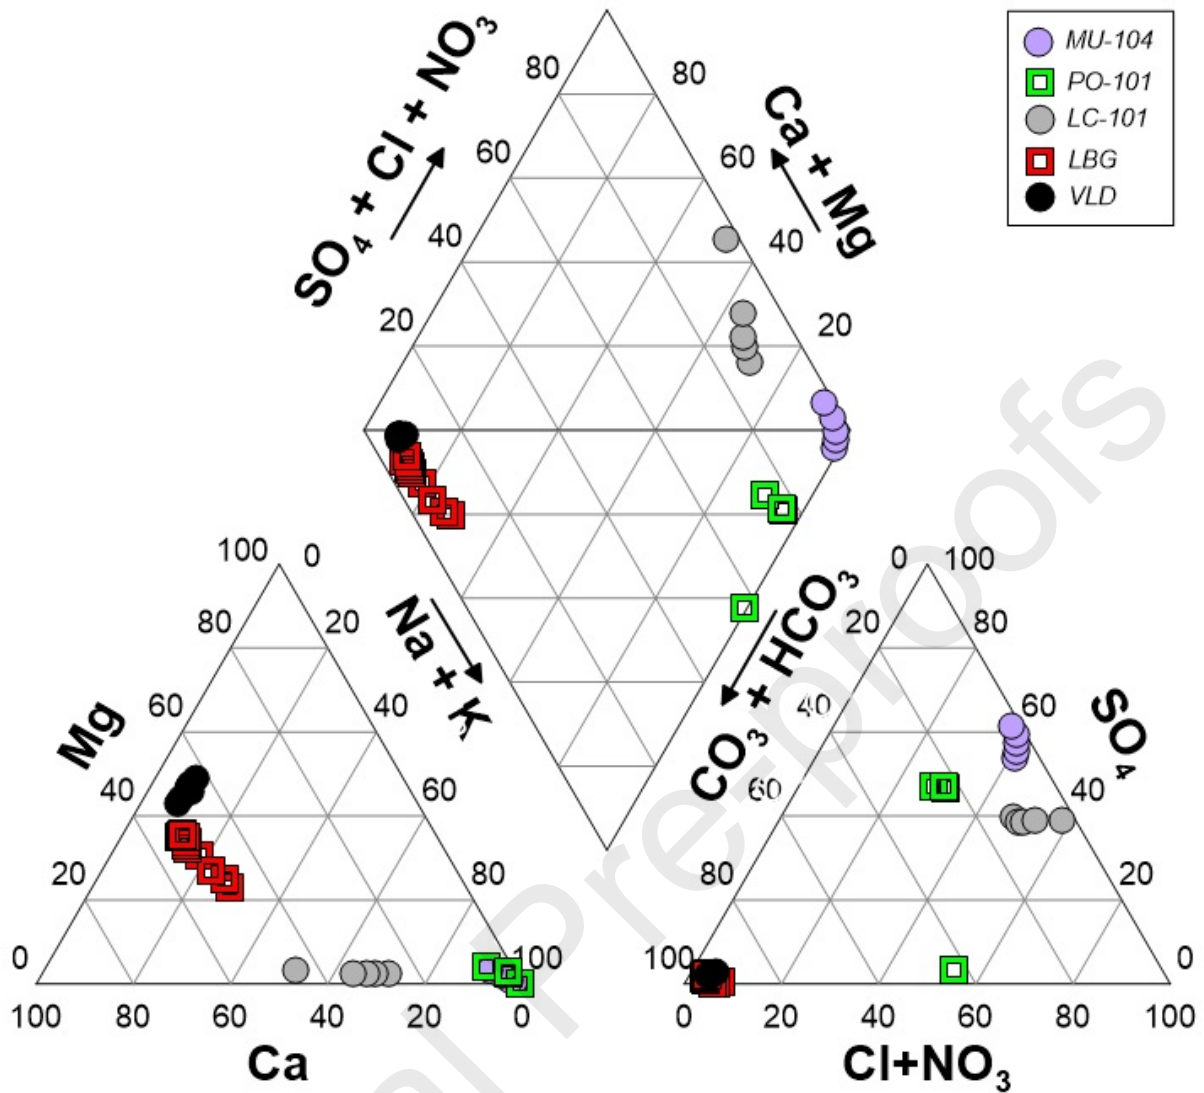

446  
 447 Figure 6: Piper diagram of all the waters sampled in the Paleocene-Eocene aquifer (depth discrete  
 448 samples and samples by pumping).

449

450 Albeit being located close to VLD, the LBG borehole has a more complex functioning as illustrated by  
 451 Figures 5 and 6 (and Supplementary information). Contrary to what is observed for VLD, all the new  
 452 data differ from the data reported shortly after borehole completion in 1990 (BSS EAU, 2020c) and  
 453 from the data reported by Brenot *et al.* (2015). The data acquired after completion may be  
 454 unrepresentative of the chemistry of the aquifer if the borehole development has not been fully  
 455 achieved in relation with the low water production. The water analysis reported in 2015 is  
 456 surprisingly enriched in Cl and  $SO_4$  and depleted in Mg and no obvious explanation can be suggested.



457 This sample was taken in 2006 (Négre *et al.*, 2006), and at this time borehole logging was done only  
458 down to 100 m below ground level, so the complete renewal of the water column could not be  
459 checked. If the pumping was too short to renew the whole water column, then part of the  
460 discrepancy may be related to changes in water chemistry resulting from interactions with the  
461 casing. Indeed, a similar enrichment in K or Cl was measured in the first sample taken while in the  
462 LBG borehole (Figure 5), but no Mg depletion or SO<sub>4</sub> enrichments can be seen. While purging, the  
463 water chemistry progressively shifts to more and more reproducible values.

464 The comparison with deep sampling is informative as such. Some differences can be seen between  
465 the first two downhole samples at 130 and 163 m depth, and only the last one appears to be  
466 representative of the chemistry obtained at the end of well pumping (Figure 5). This confirms that  
467 the water inflow in LBG borehole occurs mostly from the bottom of the screened interval, as earlier  
468 demonstrated by physico-chemical logging. As the purge increases, the water at 130 m depth is  
469 progressively renewed by the upward flow, leading to a convergence of chemical data at the end of  
470 the sampling session. At that time, all the water in the screened interval has been completely  
471 renewed and even higher up to the pump intake.

472 As a consequence, downhole sampling, if performed in the screened interval and where water flows  
473 in, can bring interpretable data even if performed without preliminary water abstraction.


474 Nevertheless, some pumping actions may be operated as a quality insurance approach, in order to  
475 ensure that some water production has occurred at depth.

476 A good representativeness of water samples can thus be obtained when the deep sampling system is  
477 driven in the appropriate sections of boreholes. Conversely, sampling in inappropriate depth leads to  
478 erroneous characterizations, as demonstrated in Figure 7 with MU-104 samples. The first sampling,  
479 done at 250 m depth, has a chemical composition similar to that of the analysis reported by Brenot  
480 *et al.* (2015) at a similar depth. If this demonstrates some reproducibility in the sampling actions over  
481 years, this does not mean that this 250 m depth sample is representative of the chemistry of the

482 Eocene aquifer. This is clearly illustrated by the chemical composition of deeper samples (500, 750  
483 and 1035 m). There is a progressive enrichment, along the casing, in Mg and Ca, and to a lesser  
484 extent in  $\text{SO}_4$  (path A in Figure 7), and conversely a progressive depletion in alkalinity and a pH  
485 decrease (Supplementary material). The same pattern can be observed in time while increasing the  
486 volume of water abstracted using the GOG system at the perforations depth (path B in Figure 7),  
487 without reaching the 1965 data, obtained when the borehole was converted into a piezometer. This  
488 1965 sample reveals a high mineralization of the water (about 3.6 g/L), clearly higher than the water  
489 sampled in the same geologic formation in neighbor wells (about 0.5 g/L - Vandenberghe, 1966).  
490 According to the author, the sample is not representative of the formation water because of the  
491 many cleaning operations after perforating. High amounts of hydrochloric acid (HCl) and ammonium  
492 hydrogen fluoride ( $\text{F}_2\text{H NH}_4$ ) acid were injected in 1965 and only half of these amounts were pumped  
493 back. The consequence was the measurement of high concentrations of chloride (572 mg/L) and  
494 fluoride (17 mg/L) which are still observable today at the bottom of the well. Assuming that the 1965  
495 data were not representative of the aquifer chemistry at the time of collection, then the new data  
496 confirm that the contamination (by chloride and fluoride) is still present 50 years later. This reveals  
497 an insufficient water renewal at depth through the perforations and a too low purged volume (about  
498 60 liters) from the 1035 m depth.

499 Nevertheless, even if the representativeness of the 1035 m depth samples may be questioned, the  
500 behavior of dissolved species at 1035 m and in the water column can be discussed. First, the Ca  
501 content at 1035 m depth is consistent with a water in equilibrium at 45°C with calcite and a  $\text{pCO}_2$   
502 close to  $10^{-3.5}$  atm (according to calculations with PHREEQC code – Parkhurst and Appelo, 2013).  
503 Then, the alkalinity increase in the cased section (path C in Figure 7) is probably due to two chemical  
504 processes occurring in the water column: *i*) corrosion of the casing, involving a pH increase and a  
505 decrease of Mg, Ca and Mn concentrations (Nilsson and Sandberg, 2017); and *ii*) sulfate reduction by  
506 micro-organisms as revealed by sulfate isotopes (see following paragraph). The sulfate reduction  
507 involves the production of sulfides (about 1 mmol/L under  $\text{HS}^-$  form because of pH conditions)

508 increasing the alkalinity of waters and the decrease of their redox potential. The sulfate reduction  
 509 seems to be the main process impacting sulfate since the precipitation of  $\text{SO}_4$ -rich phases (anhydrite,  
 510 gypsum) is not supported by calculation of saturation indexes, which are always negative and thus  
 511 not indicating developed precipitation.

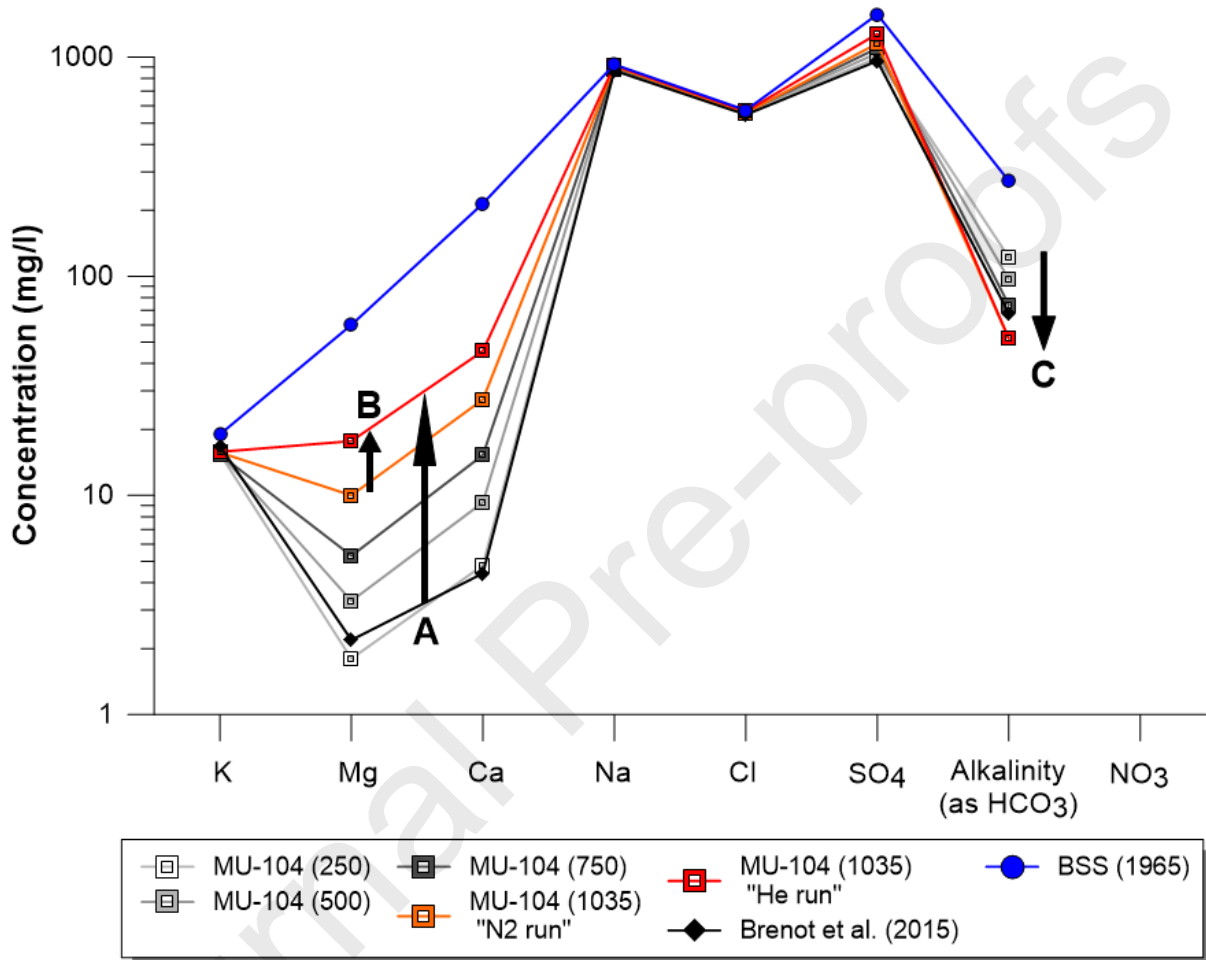

512


513 Figure 7: Schoeller diagram for MU-104 samples; note that the alkalinity is expressed as the  $\text{HCO}_3$   
 514 content; some contributing species may not have been quantified.

515

516 Another process can decrease the concentration in sulfate. Figure 8 reports the evolution of S and O  
 517 isotopes of the  $\text{SO}_4$  for MU-104 and PO-101. There is no change of isotope signature for PO-101  
 518 when comparing samples acquired before and after water abstraction by pumping. This suggests that  
 519 water flow through perforations at depth is sufficiently developed in PO-101 and that representative

520 samples can be obtained after a minor purge. The two samples obtained at 1035 m in MU-104 also  
521 have very comparable isotope values albeit their concentrations in  $\text{SO}_4$  are slightly different. When  
522 including the samples obtained in the cased section, the S-isotope ratios still point to an origin of the  
523 sulfates related to interactions with evaporitic formations, as earlier reported by André *et al.* (2002)  
524 and Brenot *et al.* (2015). But their plot with the O-isotope values of the  $\text{SO}_4$  (black arrow in the right  
525 inset of Figure 8) leans from high ratios to lower ones, as a function of depth. The information  
526 obtained at the level of the perforations is very close to the endmember representing the interaction  
527 with local evaporites. In their 2015 paper, Brenot *et al.* reported a value obtained with a sampling at  
528 250 m and they suggested that such a sampling may not be representative. This non-  
529 representativeness is clearly established here with the new results. There is no need to refer to  
530 mixing between endmembers to attribute the origin of sulfates in MU-104. This origin is the same as  
531 for many other boreholes tapping the Eocene aquifer but, depending on the sampling depth, sulfate-  
532 reduction processes occur in the casing and strongly alter the isotope signature of the sulfates.

533

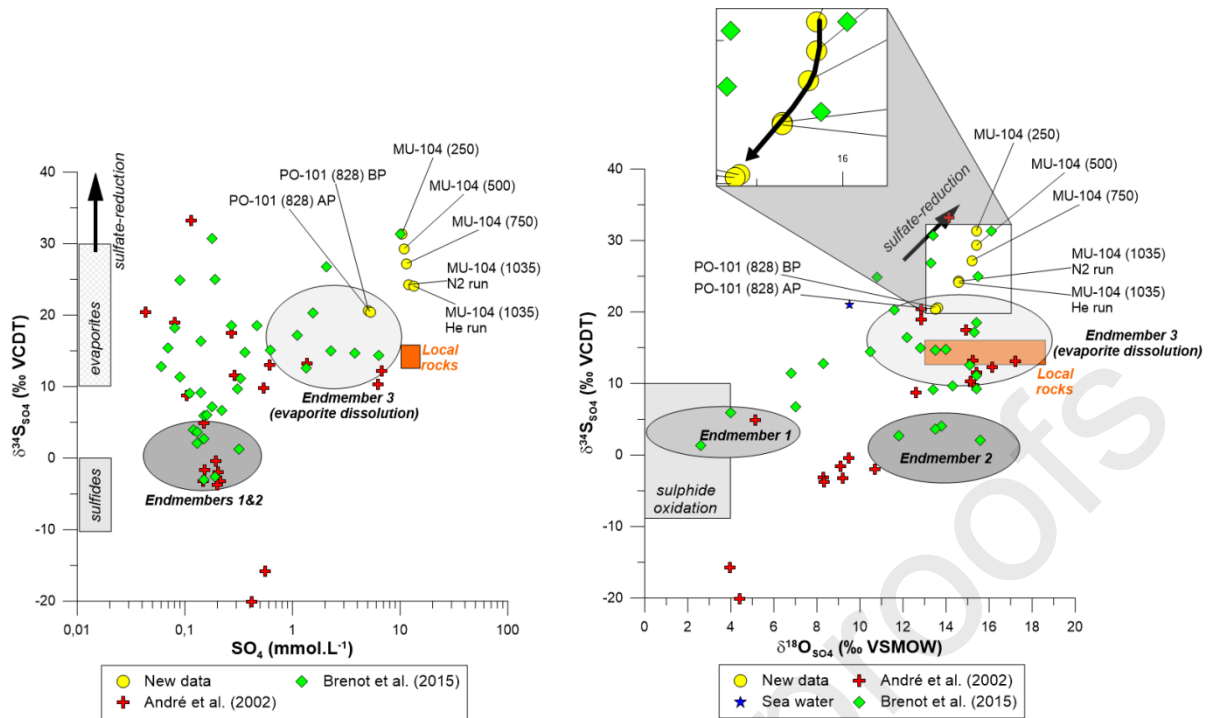

534

535 Figure 8: left:  $\text{SO}_4 - \delta^{34}\text{S}_{\text{SO}_4}$  relation; right:  $\delta^{18}\text{O}_{\text{SO}_4} - \delta^{34}\text{S}_{\text{SO}_4}$  relation. Endmembers 1, 2, 3, and local  
 536 rock fields as defined by Brenot et al. (2015).

537

538 It is interesting to mention that not all the isotope ratios are modified by a long contact period with  
 539 steel casing. An example can be found in Supplementary information with the oxygen and hydrogen  
 540 isotopes of the water molecule. All the samples collected in the water column of MU-104 point to  
 541 the same isotope value, minor variation being linked to the uncertainty on the measurement. The  
 542 data obtained at 250 m depth give thus reliable indication on the recharge processes experienced by  
 543 the MU-104 waters. The samples from PO-101 follow the same rule, with minor variations when  
 544 sampled before or after borehole pumping.

545

## 546 **5.2 Learnings from borehole characterization and deep sampling**

547 The first outcome is for relatively shallow boreholes (LBG and VLD – tapped sections located from  
 548 around 100 to 160 m bgl). In such boreholes, downhole sampling can be performed with a high level

549 of confidence provided the completion of the borehole is known and the levels of water flow in the  
550 screened interval are located. In the absence of good knowledge of waters flows and the evolution of  
551 the borehole equipment, some water abstraction may be required to ensure water renewal in the  
552 screened section.

553 The second outcome is for deep boreholes and it splits into several subgroups. When the water flow  
554 is supposed to be not too low, as in PO-101, deep sampling can be operated without water  
555 abstraction. The situation becomes then similar to that of shallow boreholes. Because knowing if  
556 water flows are not too low, if the screens are not scaled or if the completion is not damaged is often  
557 tricky, complementary actions may be required before sampling downhole to ensure of  
558 representativeness of the sampling action. The first is to perform water abstraction to ensure some  
559 water renewal. This may provide information on continued existence of connectivity with the aquifer  
560 by following the water level over time but this does not provide information on the levels from which  
561 water is produced. This information can be obtained by flow logging in a borehole but also from deep  
562 sampling operations. Deep sampling performed in the perforations/screens prior to pumping and  
563 repeated when the pumping is active, with potentially displacement of the sample intake of the  
564 system, helps to locate where there is some water renewal at depth and therefore where there is  
565 connectivity to the aquifer. Because these operations may be time consuming, the use of alternative  
566 information sources, such as water logging and/or video inspection, may be preferred, but, in turn,  
567 such investigations may become costly. As a result, there is often a lack of knowledge of the  
568 functioning of deep boreholes, which is regrettable from a representativeness point of view. This  
569 may result in biased understanding of the aquifer chemical properties and reporting of non-  
570 representative data.

571 In spite of this lack of characterization of the water flows in deep boreholes, the present study has  
572 demonstrated that the combined used of deep sampling techniques and preliminary abstraction of a

573 water volume equivalent to that of the screened section/perforated interval may be sufficient to get  
574 realistic description of the water-mass.

575

## 576 **6. Conclusions**

577 Deep sampling techniques were used to characterize the Eocene aquifer in the Aquitaine basin. The  
578 observed boreholes ranged from 130 to more than 1000 m in depth thus excluding, or making the  
579 use of a pump complex and costly. A monitoring strategy has been defined by performing sequential  
580 pumping and frequent water logging in the shallower boreholes. This suggested that deep sampling  
581 can be done with virtually no purge provided the borehole geometry is known and the productive  
582 levels are located. Because this may not be the case, a better approach is to perform some water  
583 abstraction to renew the water at the productive level(s) before doing deep sampling.  
584 Complementary investigations such as video inspection and water logging give a better constraining  
585 of the sampling actions.

586 This strategy has been applied to selected deep boreholes. Albeit they were not all characterized in  
587 the same way, investigations have demonstrated that:

- 588 - Good reproducibility can be obtained by deep sampling when water flow is not too low, even  
589 without a purging step;
- 590 - In low-yield boreholes, some preliminary water abstraction may be required in view of  
591 getting samples that are more representative. An alternative approach is to have a purge-like  
592 phase with several uses of the deep sampling system prior getting samples for subsequent  
593 laboratory analyses;
- 594 - If the water is sampled from the cased section, or correlatively if the purging phase (not  
595 associated with deep sampling) is not sufficiently developed to produce renewed water at  
596 the surface, then the characterization of the aquifer chemistry can be biased: loss or gain of  
597 elements or shift in isotope signatures;

598 The recommended approach to use for deep borehole characterization is to abstract a volume of  
599 water equivalent to that of the screened interval or, if unrealistic, to activate/enhance water  
600 circulation in the screened interval by abstracting several hundreds of liters of water. Some water  
601 will be produced by the productive levels, even the low-yield ones, and appropriate deepening of the  
602 sampling system in these levels will allow getting representative samples.

603

#### 604 **Acknowledgments**

605 The BRGM Research Directorate funded acquisitions in MU-104. The GAIA project funded the  
606 acquisitions in VLD, LBG, LC-101 and PO-101; Teréga, the Adour-Garonne Water Agency (AEAG) and  
607 the BRGM funded the GAIA project. P. Marchet (AEAG) and P. Chiquet (Teréga) are specifically  
608 thanked. Hydro-Assistance performed water logging and pumping in PO-101 and LC-101. G.  
609 Bentivegna, M. Brach, E. Decouchon, M. Djemil and A. Grandemange are warmly thanked for their  
610 assistance during field acquisitions. We thank the two anonymous reviewers for critical reading and  
611 whose comments/suggestions helped to improve the manuscript.



612 **7. References**

- 613 ADES, 2020. <https://ades.eaufrance.fr/fmasseseau/2009/FRFG082.pdf>
- 614 AFBAG (Agence Financière de Bassin Adour-Garonne), 1974. Transformation du forage pétrolier  
615 Polastron 101 en piézomètre de la nappe infra-molassique.  
616 [http://ficheinfoterre.brgm.fr/InfoterreFiche/scan?name=S276670.PDF&path=/filer/scans/bss\\_a](http://ficheinfoterre.brgm.fr/InfoterreFiche/scan?name=S276670.PDF&path=/filer/scans/bss_a)
- 617 André, L., 2002. Contribution de la géochimie à la connaissance des écoulements souterrains  
618 profonds Application à l'aquifère des Sables Infra-Molassiques du Bassin Aquitain, PhD thesis,  
619 Bordeaux 3 University, [http://sigesaqi.brgm.fr/IMG/pdf/these\\_andre2002.pdf](http://sigesaqi.brgm.fr/IMG/pdf/these_andre2002.pdf).
- 620 André, L., Franceschi, M., Pouchan, P., Atteia, O., 2002. Origine et évolution du soufre au sein de  
621 l'aquifère des Sables infra-molassiques du Bassin aquitain. Comptes Rendus Geoscience 334, 749–  
622 756. [https://doi.org/10.1016/S1631-0713\(02\)01814-X](https://doi.org/10.1016/S1631-0713(02)01814-X).
- 623 André, L., Franceschi, M., Pouchan, P., Atteia, O., 2005. Using geochemical data and modelling to  
624 enhance the understanding of groundwater flow in a regional deep aquifer, Aquitaine Basin, south-  
625 west of France. Journal of Hydrology 305, 40–62. <https://doi.org/10.1016/j.jhydrol.2004.08.027>.
- 626 Barcelona, M.J., Helfrich, J.A., 1986. Well construction and purging effects on ground-water samples.  
627 Environ. Sci. Technol. 20, 1179–1184. <https://doi.org/10.1021/es00153a015>.
- 628 Barcelona, M.J., Wehrraann, H.A., Varljen, M.D., 1994. Reproducible Well-Purging Procedures and  
629 VOC Stabilization Criteria for Ground-Water Sampling. Groundwater 32, 12–22.  
630 <https://doi.org/10.1111/j.1745-6584.1994.tb00605.x>.
- 631 Barcelona, M.J., Varljen, M.D., Puls, R.W., Kaminski, D., 2005. Ground water purging and sampling  
632 methods: History vs. hysteria. Groundwater Monitoring & Remediation 25, 52–62.  
633 <https://doi.org/10.1111/j.1745-6592.2005.0001.x>.
- 634 Barrière J., Gal F., André L., Wuilleumier A., with the collaboration of Bentivegna G., Djemil M., 2019.  
635 Projet GAIA. Investigations dans les forages profonds de Polastron, Saint-André et Lacquy:

- 636 caractérisation, diagraphies de production, prélèvements sélectifs et analyses. BRGM report RP-  
637 69170-FR, 82 p., in French. <http://infoterre.brgm.fr/rapports//RP-69170-FR.pdf>
- 638 Berard, P., Sourisseau, B., 1998. Ressources thermales du Bas Adour. Actualisation et régularisation  
639 des données, piézométrie, protection globale de la ressource. Report BRGM/RR-40011-FR.  
640 <http://infoterre.brgm.fr/rapports//RR-40011-FR.pdf>
- 641 Black, W.H., Smith, H.R., Patton, F.D., 1986. Multiple-Level Ground-Water Monitoring With the MP  
642 System, Proceedings of the Conference on Surface and Borehole Geophysical Methods and  
643 Ground Water Instrumentation, National Water Well Association, Dublin, OH, 1986, pp. 41 – 60.
- 644 Boreham, C., Underschultz, J., Stalker, L., Kirste, D., Freifeld, B., Jenkins, C., Ennis-King, J., 2011.  
645 Monitoring of CO<sub>2</sub> storage in a depleted natural gas reservoir: Gas geochemistry from the CO<sub>2</sub>CRC  
646 Otway Project, Australia. International Journal of Greenhouse Gas Control 5, 1039–1054.  
647 <https://doi.org/10.1016/j.ijggc.2011.03.011>.
- 648 Brenot, A., Négrel, P., Petelet-Giraud, E., Millot, R., Malcuit, E., 2015. Insights from the salinity origins  
649 and interconnections of aquifers in a regional scale sedimentary aquifer system (Adour-Garonne  
650 district, SW France): Contributions of  $\delta^{34}\text{S}$  and  $\delta^{18}\text{O}$  from dissolved sulfates and the  $^{87}\text{Sr}/^{86}\text{Sr}$  ratio.  
651 Applied Geochemistry 53, 27–41. <https://doi.org/10.1016/j.apgeochem.2014.12.002>.
- 652 Brown, E., Skougstad, M.W., Fishman, M.J., 1970. Methods for collection and analysis of water  
653 samples for dissolved minerals and gases. US Geological Survey Water-Resources Inv. Techniques,  
654 Book 5, Chapter A1. <https://pubs.usgs.gov/twri/05a01-1979/report.pdf>.
- 655 BSS EAU, 2020a. [http://fichebssseau.brgm.fr/bss\\_eau/fiche.jsf?code=10098A0004/F](http://fichebssseau.brgm.fr/bss_eau/fiche.jsf?code=10098A0004/F)
- 656 [BSS EAU, 2020b. https://ades.eaufrance.fr/Fiche/PtEau?Code=09866X0074/F](https://ades.eaufrance.fr/Fiche/PtEau?Code=09866X0074/F)
- 657 [BSS EAU, 2020c. https://ades.eaufrance.fr/Fiche/PtEau?Code=10122X0055/F](https://ades.eaufrance.fr/Fiche/PtEau?Code=10122X0055/F)

- 658 Chapman, S., Parker, B., Cherry, J., Munn, J., Malenica, A., Ingleton, R., Jiang, Y., Padusenko, G.,  
659 Piersol, J., 2015. Hybrid Multilevel System for Monitoring Groundwater Flow and Agricultural Impacts  
660 in Fractured Sedimentary Bedrock. *Groundwater Monitoring & Remediation* 35, 55–67.  
661 <https://doi.org/10.1111/gwmr.12084>.
- 662 Cherry, J.A., Johnson, P.E., 1982. A multilevel device for monitoring in fractured rock. *Groundwater*  
663 *Monitoring & Remediation* 2, 41–44. <https://doi.org/10.1111/j.1745-6592.1982.tb00839.x>.
- 664 Cherry, J.A., Parker, B.L., Keller, C., 2007. A New Depth-Discrete Multilevel Monitoring Approach for  
665 Fractured Rock. *Groundwater Monitoring & Remediation* 27, 57–70. [https://doi.org/10.1111/j.1745-](https://doi.org/10.1111/j.1745-6592.2007.00137.x)  
666 [6592.2007.00137.x](https://doi.org/10.1111/j.1745-6592.2007.00137.x).
- 667 Conaway, C.H., Thordsen, J.J., Manning, M.A., Cook, P.J., Trautz, R.C., Thomas, B., Kharaka, Y.K., 2016.  
668 Comparison of geochemical data obtained using four brine sampling methods at the SECARB Phase III  
669 Anthropogenic Test CO<sub>2</sub> injection site, Citronelle Oil Field, Alabama. *International Journal of Coal*  
670 *Geology* 162, 85–95. <https://doi.org/10.1016/j.coal.2016.06.001>.
- 671 Crombie, A., Halford, F., Hashem, M., McNeil, R., Melbourne, G., Mullins, O.C., 1998. Innovations in  
672 Wireline Fluid Sampling. *Oilfield Review* 26–41.
- 673 Duncan, D., Harvey, F., Walker, M., and the Australian Water Quality Centre, 2007. EPA Guidelines:  
674 Regulatory monitoring and testing – Water and wastewater sampling.  
675 [https://www.epa.sa.gov.au/files/8494\\_guide\\_wws.pdf](https://www.epa.sa.gov.au/files/8494_guide_wws.pdf).
- 676 Einarson, M.D., Cherry, J.A., 2002. A New Multilevel Ground Water Monitoring System Using  
677 Multichannel Tubing. *Groundwater Monitoring & Remediation* 22, 52–65.  
678 <https://doi.org/10.1111/j.1745-6592.2002.tb00771.x>.
- 679 Einarson, M.D., 2005. Multilevel Ground-Water Monitoring, in: *Practical Handbook of Environmental*  
680 *Site Characterization and Ground-Water Monitoring*. Taylor and Francis, pp. 808–845.

- 681 Freifeld, B.M., Trautz, R.C., Kharaka, Y.K., Phelps, T.J., Myer, L.R., Hovorka, S.D., Collins, D.J., 2005.  
682 The U-tube: A novel system for acquiring borehole fluid samples from a deep geologic CO<sub>2</sub>  
683 sequestration experiment. *Journal of Geophysical Research: Solid Earth* 110.  
684 <https://doi.org/10.1029/2005JB003735>.
- 685 Gal, F., Brach, M., Pauwels, H., 2014. A new sampling method for collecting fluids at depth, Fourth  
686 EAGE CO<sub>2</sub> Geological Storage Workshop, Stavanger, 22-24 April 2014.  
687 [https://www.researchgate.net/publication/266637769\\_A\\_New\\_Sampling\\_Method\\_for\\_Collecting\\_Fl](https://www.researchgate.net/publication/266637769_A_New_Sampling_Method_for_Collecting_Fluids_at_Depth)  
688 [uids at Depth](https://www.researchgate.net/publication/266637769_A_New_Sampling_Method_for_Collecting_Fluids_at_Depth).
- 689 Gal, F., Lions, J., Grellier, S., Squarcioni, P., Barrière, J., 2017. Deep Aquifer Sampling and the Use of  
690 Ball Check-valves Systems. *Energy Procedia* 114, 3812–3823.  
691 <https://doi.org/10.1016/j.egypro.2017.03.1512>.
- 692 Ghestem, J.P., Gal, F., Moreau, P., 2017. AQUAREF -Opérations d'échantillonnage d'eau souterraine  
693 dans le cadre des programmes de surveillance DCE-Recommandations techniques – Edition 2017.  
694 [https://www.aquaref.fr/system/files/AQUAREF\\_2017\\_Guide\\_Echantillonnage\\_ESO.pdf](https://www.aquaref.fr/system/files/AQUAREF_2017_Guide_Echantillonnage_ESO.pdf).
- 695 Gibb, J.P., Schuller, R.M., Griffin, R.A., 1981. Procedures for the collection of representative water  
696 quality data from monitoring wells. Illinois State Water Survey, Illinois State Geological Survey.  
697 <http://citeseerx.ist.psu.edu/viewdoc/download?doi=10.1.1.880.9682&rep=rep1&type=pdf>.
- 698 ISO 5667-11, 2009. Water quality — Sampling — Part 11: Guidance on sampling of groundwaters.  
699 <https://www.iso.org/standard/42990.html>.
- 700 Lallemand-Barrès, A., 1993. Guide pratique d'échantillonnage des eaux souterraines. BRGM report R-  
701 37390-ENV-4S-93 (in French). <http://infoterre.brgm.fr/rapports/RR-37390-FR.pdf>.
- 702 Ministère du Développement Durable, de l'Environnement et des Parcs du Québec, 2011. Guide  
703 d'échantillonnage à des fins d'analyses environnementales : cahier 3 – Échantillonnage des eaux

- 704 souterraines, Centre d'expertise en analyse environnementale du Québec, 60 p.
- 705 [http://www.ceaeq.gouv.qc.ca/documents/publications/echantillonnage/eaux\\_soutC3.pdf](http://www.ceaeq.gouv.qc.ca/documents/publications/echantillonnage/eaux_soutC3.pdf).
- 706 Négrel, Ph., Colin, A., Petelet-Giraud, E., Brenot, A., Millot, R., Roy, S., 2006. CARISMEAU:  
707 caractérisation isotopique et géochimique des masses d'eau dans le bassin Adour Garonne:  
708 interconnexions et hétérogénéités. BRGM report RP-55069-FR (in French), 128 p.  
709 <http://infoterre.brgm.fr/rapports//RP-55069-FR.pdf>.
- 710 Négrel, P., Roy, S., Petelet-Giraud, E., Brenot, A., Millot, R., Dutartre, P., Fournier, I., 2008. Les outils  
711 de diagrapie chimique pour la caractérisation des masses d'eau. Principes et exemple d'application.  
712 Techniques Sciences Méthodes 11, 29–46. <https://doi.org/10.1051/tsm/200811029>.
- 713 Nilsson A.-C., Sandberg B., 2017. Elevated pH values in groundwater. Observations from SKB  
714 investigations 1976–2014 and possible causes. Report SKB R-16-04. ISSN 1402-3091.  
715 <http://www.skb.com/publication/2485482/R-16-04.pdf>.
- 716 OFEV, 2003. Echantillonnage des eaux souterraines. Office fédéral de l'environnement, Bern.  
717 [https://www.bafu.admin.ch/bafu/fr/home/themes/eaux/publications/publications-](https://www.bafu.admin.ch/bafu/fr/home/themes/eaux/publications/publications-eaux/echantillonnage-des-eaux-souterraines.html)  
718 [eaux/echantillonnage-des-eaux-souterraines.html](https://www.bafu.admin.ch/bafu/fr/home/themes/eaux/publications/publications-eaux/echantillonnage-des-eaux-souterraines.html).
- 719 Parkhurst, D.L., Appelo, C.A.J., 2013. Description of input and examples for PHREEQC version 3 - A  
720 computer program for speciation, batch-reaction, one-dimensional transport, and inverse  
721 geochemical calculations: U.S. Geological Survey Techniques and Methods. Book 6, chap. A43, 497 p.
- 722 Pohlmann, K.F., Alduino, A.J., 1992. Potential sources of error in ground-water sampling at hazardous  
723 waste sites. Ground water issue (No. EPA/540/S-2/019). US-EPA.  
724 <https://nepis.epa.gov/Exe/ZyPURL.cgi?Dockey=910004RS.txt>.
- 725 Puls, R.W., Powell, R.M., 1992. Acquisition of Representative Ground Water Quality Samples for  
726 Metals. Groundwater Monitoring & Remediation 12, 167–176. [https://doi.org/10.1111/j.1745-](https://doi.org/10.1111/j.1745-6592.1992.tb00057.x)  
727 [6592.1992.tb00057.x](https://doi.org/10.1111/j.1745-6592.1992.tb00057.x).

- 728 Puls, R.W., Barcelona, M.J., 1996. Low-Flow (Minimal Drawdown) Ground Water Sampling  
729 Procedures (No. EPA/540/S-95/504), Ground Water Issue. U.S. EPA.  
730 [https://cfpub.epa.gov/si/si\\_public\\_record\\_report.cfm?Lab=NRMRL&dirEntryId=126106](https://cfpub.epa.gov/si/si_public_record_report.cfm?Lab=NRMRL&dirEntryId=126106).
- 731 Rainwater, F.H., Thatcher, L.L., 1960. Methods for collection and analysis of water samples.  
732 Washington, U.S. Govt. Print. Off. <https://pubs.usgs.gov/wsp/1454/report.pdf>.
- 733 Roche, J., with the participation of Grech, B., 1977. Surveillance piézométrique des nappes profondes  
734 dans la région Midi-Pyrénées. BRGM report 77-SGN-396-MPY (in French).  
735 <http://infoterre.brgm.fr/rapports/77-SGN-396-MPY.pdf>.
- 736 Shapiro, A.M., 2002. Cautions and Suggestions for Geochemical Sampling in Fractured Rock.  
737 Groundwater Monitoring & Remediation 22, 151–164. [https://doi.org/10.1111/j.1745-](https://doi.org/10.1111/j.1745-6592.2002.tb00764.x)  
738 [6592.2002.tb00764.x](https://doi.org/10.1111/j.1745-6592.2002.tb00764.x).
- 739 SIGES AQI, 2020. <http://sigesaqi.brgm.fr/IMG/pdf/334c-sim.pdf>
- 740 Smellie, J.A.T., Wikberg, P., 1991. Hydrochemical investigations at Finnsjön, Sweden. Journal of  
741 Hydrology 126, 129–158. [https://doi.org/10.1016/0022-1694\(91\)90203-T](https://doi.org/10.1016/0022-1694(91)90203-T).
- 742 US-EPA, 1999, Compendium of ERT groundwater sampling procedures. Office of Emergency and  
743 Remedial Response, U.S. Environmental Protection Agency, Washington DC.  
744 <https://www.epa.gov/sites/production/files/2015-06/documents/fieldsamp-ertsops.pdf>.
- 745 USGS, 2006. Collection of water samples. In National Field Manual for the Collection of Water-Quality  
746 Data. U.S. Geological Survey Techniques of Water-Resources Investigations, Book 9, Chapter A4,  
747 Version 2.0. <https://pubs.er.usgs.gov/publication/twri09A4>.
- 748 Vandenberghe A., 1966. La nappe sous-molassique aux environs de Muret (Haute-Garonne). Résultat  
749 des travaux effectués sur le forage Mu 104. BRGM Report DSGR.66.A38 (in French).  
750 <http://infoterre.brgm.fr/rapports/66-DSGR-A-038.pdf>.

751 Wolff-Boenisch, D., Evans, K., 2014. Review of available fluid sampling tools and sample recovery  
752 techniques for groundwater and unconventional geothermal research as well as carbon storage in  
753 deep sedimentary aquifers. *Journal of Hydrology* 513, 68–80.  
754 <https://doi.org/10.1016/j.jhydrol.2014.03.032>.

755 Wood, W.W., 1976. Guidelines for collection and field analysis of ground-water samples for selected  
756 unstable constituents. USGS—TWRI Book 1, Chapter D2. [https://pubs.usgs.gov/twri/twri1-](https://pubs.usgs.gov/twri/twri1-d2/pdf/twri_1-D2_a.pdf)  
757 [d2/pdf/twri\\_1-D2\\_a.pdf](https://pubs.usgs.gov/twri/twri1-d2/pdf/twri_1-D2_a.pdf).

758 Groundwater sampling in boreholes has been carried out for decades according to well-established  
759 protocols and regulations. An important requirement in this context is the need to purge the  
760 borehole prior to any sampling action, the volume of the purge being adapted to the water flow and  
761 the regulatory context. Contaminated site investigations have introduced the concept of water  
762 column heterogeneity in the screened section of boreholes, which also occurs in some  
763 uncontaminated boreholes or in long-screened boreholes. Specific guidelines and practices were  
764 thus introduced, in particular the concept of discrete sampling. This type of sampling can be  
765 advantageously used in deep boreholes, provided that there is some renewal of water at the screens  
766 or the perforated intervals. The present study aims to take a step forward in the characterization of  
767 deep boreholes set up in the Aquitaine basin in France, by defining a protocol for relatively short  
768 boreholes (depth < 170 m) and applying it to much deeper boreholes, formerly drilled for oil and gas  
769 exploration (sampling up to 1035 m deep). Acquisitions were performed to better characterize water  
770 chemistry, including some isotope considerations. They were based on physico-chemical logging and  
771 endoscopic inspections where technically possible. After a review of the information provided by the  
772 investigations on the characterization of the Paleocene – Eocene aquifer in southwestern France, a  
773 methodology is proposed to make sampling in deep boreholes with low-yield more reliable, by  
774 combining the abstraction of a reduced water volume and the use of a downhole sampling system.

775

776 F. Gal: Conceptualization; Methodology; Investigation; Data Curation; Writing - Original Draft;  
 777 Visualization; Funding acquisition

778 J. Barrière: Conceptualization; Writing - Review & Editing; Supervision

779 L. André: Conceptualization; Writing - Review & Editing; Software

780 A. Wuilleumier: Conceptualization; Writing - Review & Editing; Project administration; Funding  
 781 acquisition; Supervision

782


783

784 **Highlights:**

- 785 - Obtaining representative samples in deep aquifers of low-yield
- 786 - Discrete sampling at great depth using a ball check-valve operated system
- 787 - Proposition of a methodology to increase representativeness of deep sampling


788

789

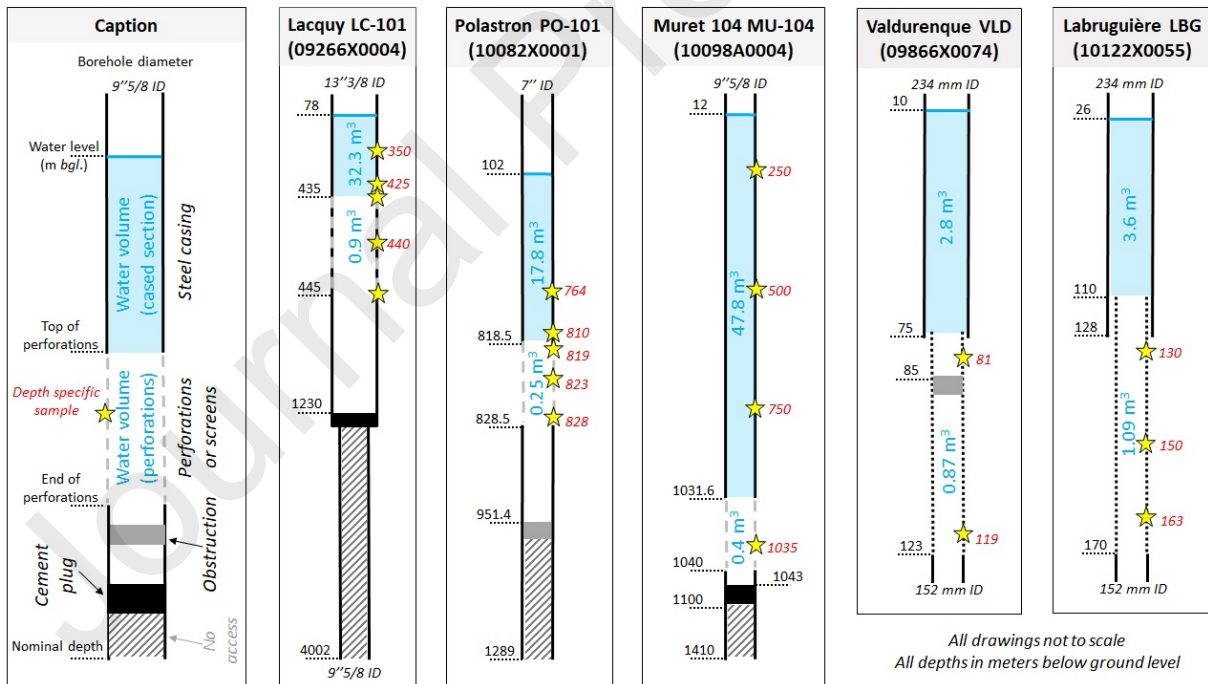


790





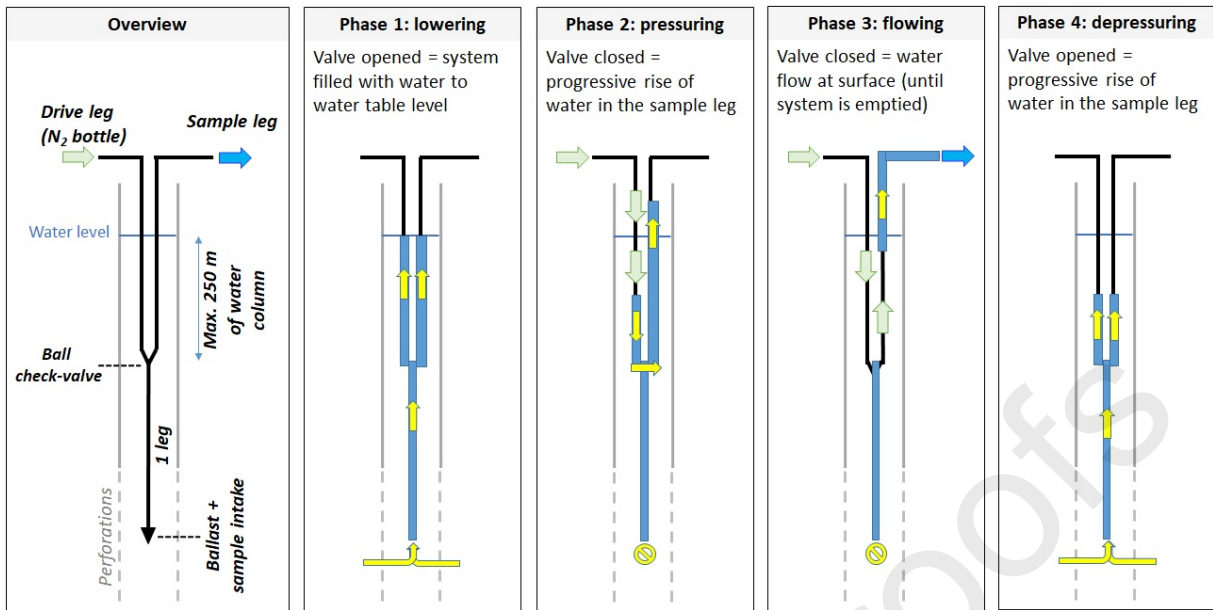


791

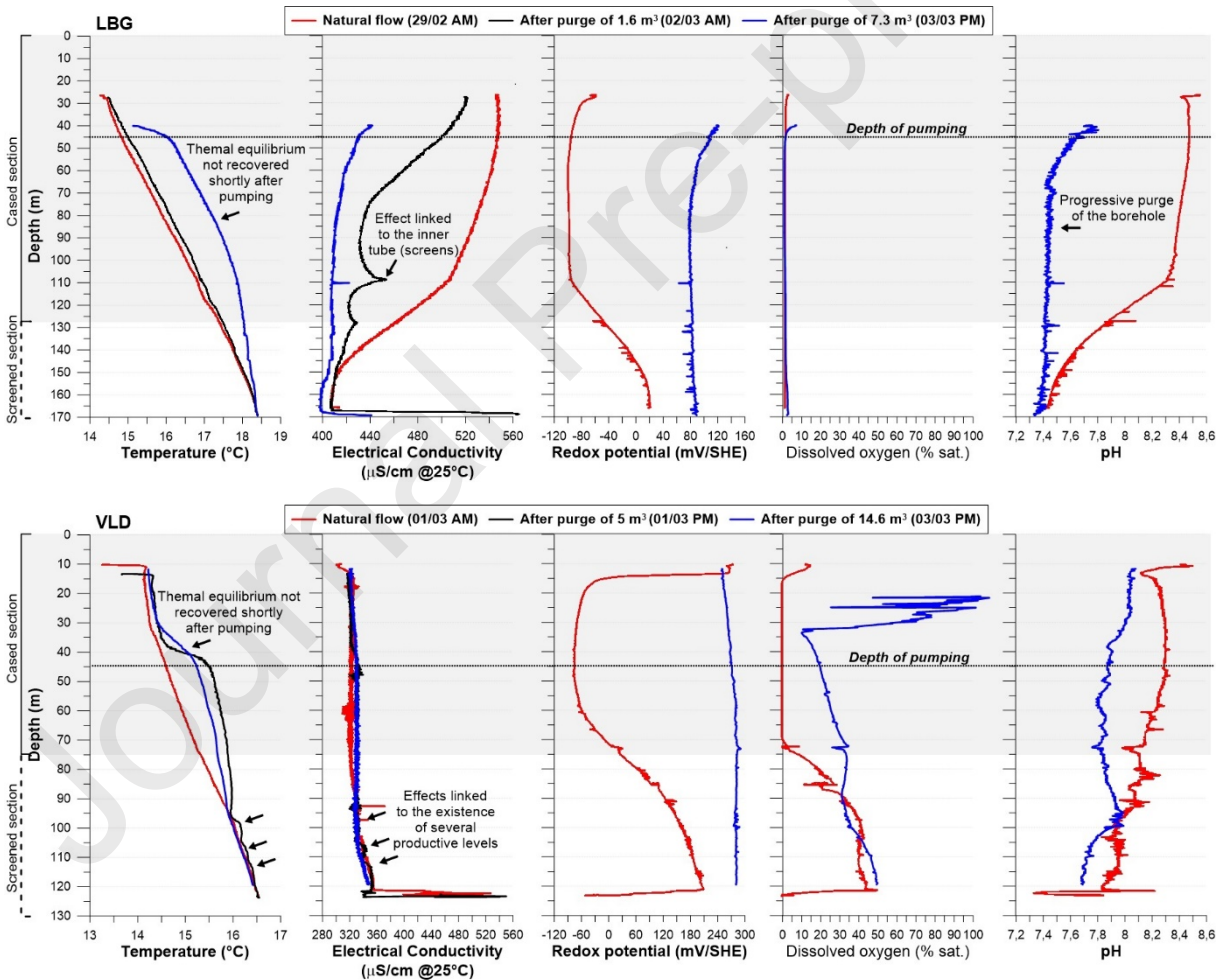


792

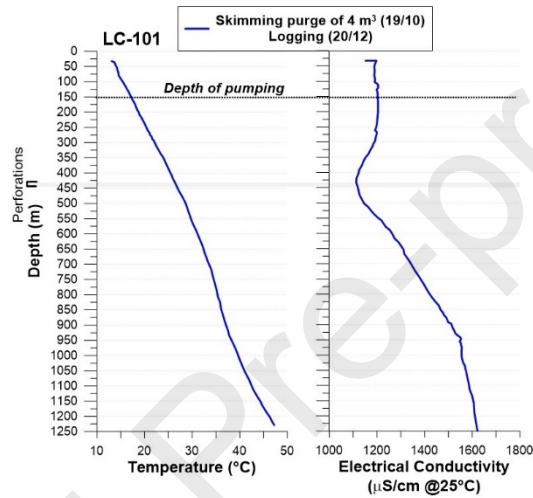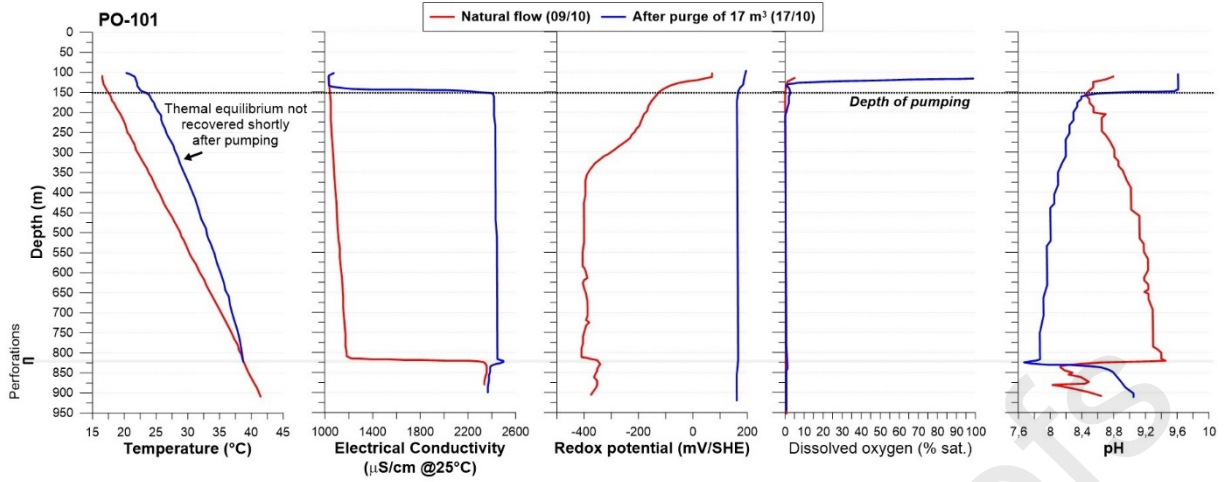


793

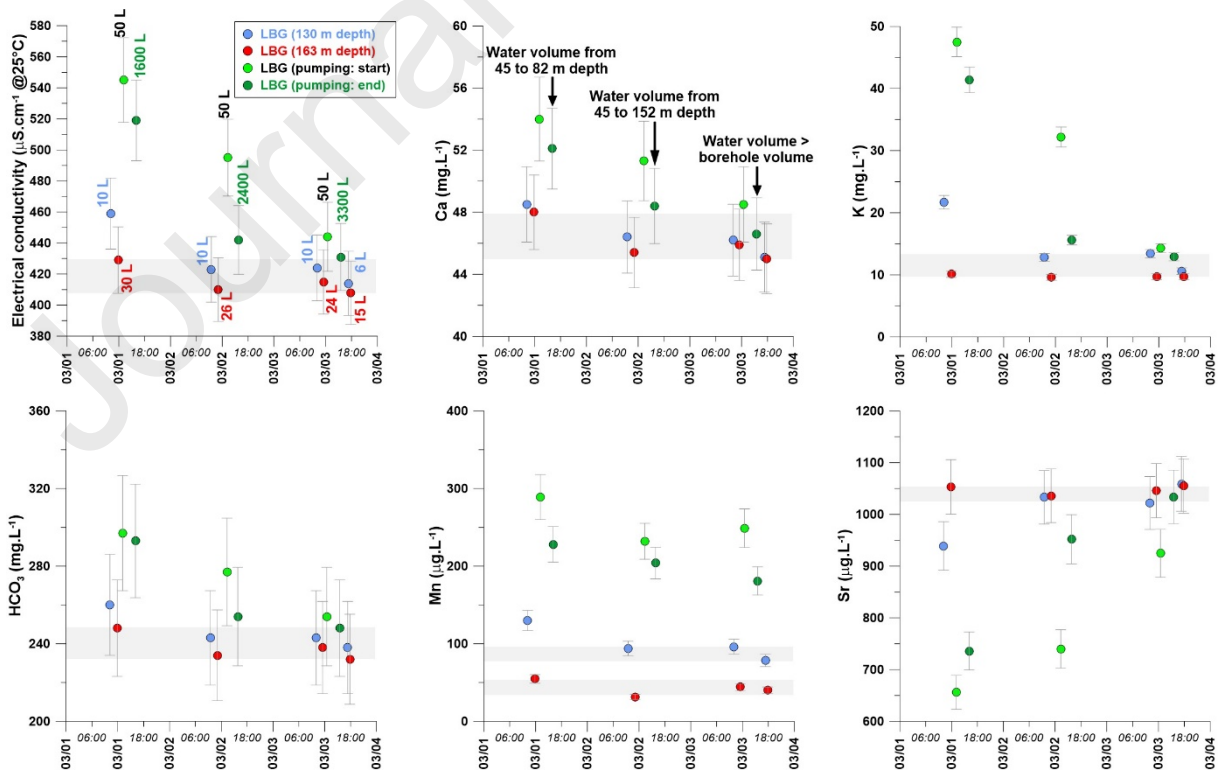


794

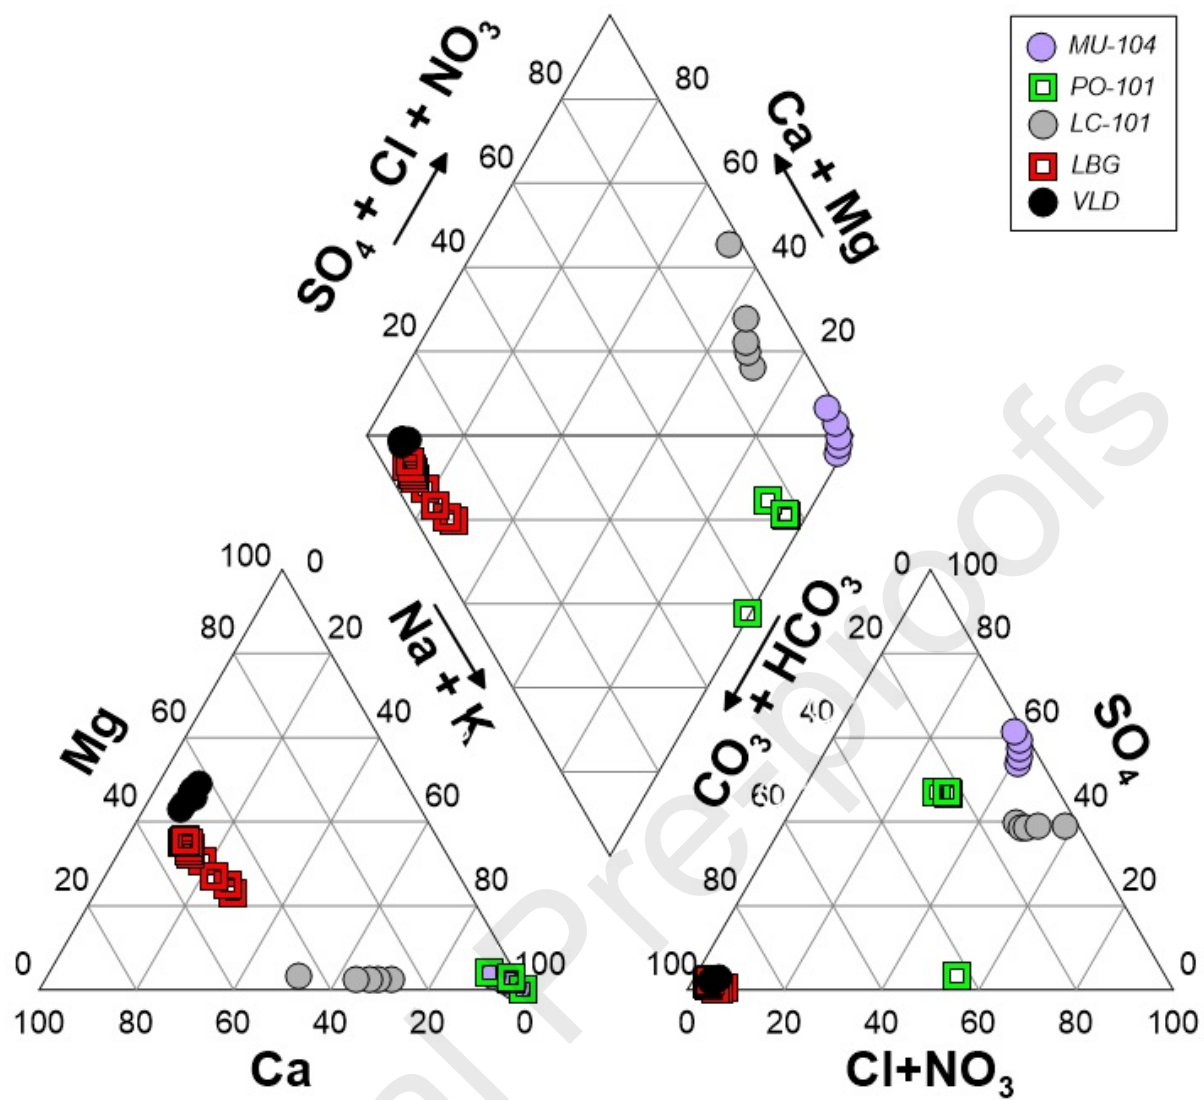

795

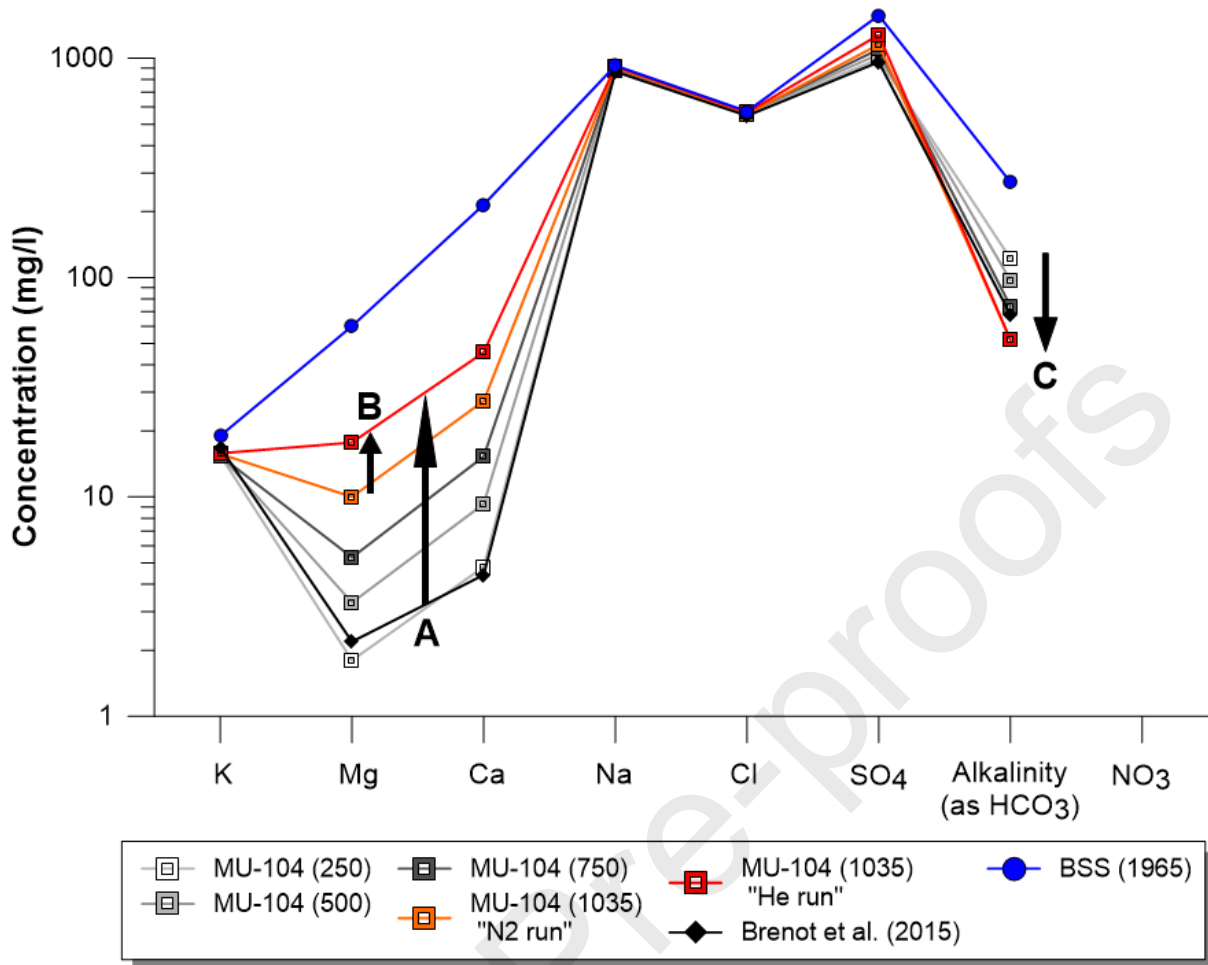

796

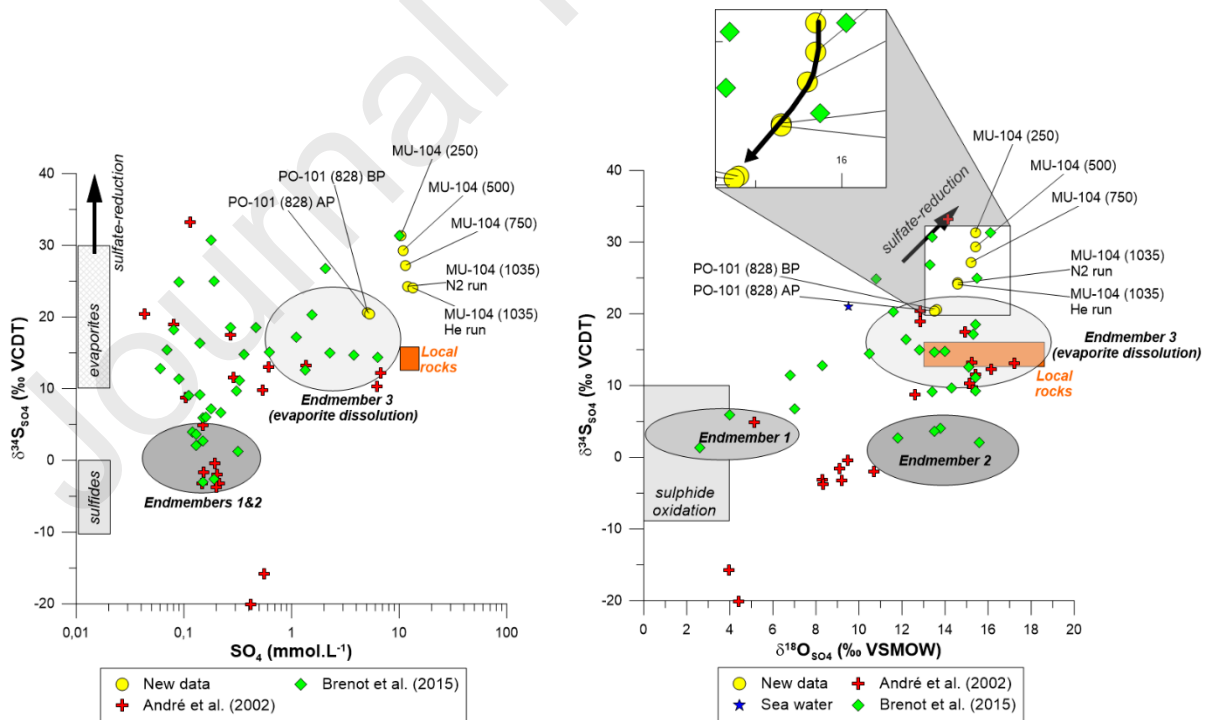

797